



PRODUCT SPECIFICATION

DTS SENF



INTRODUCTION

The DTS SENF is a recessed flush mounted passive infrared occupancy and daylight sensor for use with the DexTest Addressable DALI system.

FEATURES & BENEFITS

- **Mounting Type:** Recessed
- **Wireless:** No
- **Maximum Mounting Height:** 5m
- **Occupancy Detection:** PIR
- **Daylight Control:** Daylight Regulation
- **Output:** DALI addressable
- **Supply Power Source:** 12V-24V DC
- **IP Rating:** IP30
- **DALI consumption:** 10mA
- **Programmer:** Commissioning Software
- **Programmer:** DexTest Software
- **Voltage:** 13V to 22.2V DC
- **Detection Diameter:** 6.6m x 5.6m at 2.5M mounting height
- **Colour:** White


ADJUSTABLE PARAMETERS

- **Occupied mode:** Presence/Absence
- **Occupied Level:** 1-100%
- **Occupied Time:** up to 18 hours
- **Transition Time:** up to 18 hours
- **Transition Level:** 1-100%
- **Daylight Regulation:** Enabled/Disabled
- **Grouping:** Enabled/Disabled
- More parameters available on programmer

IMAGES



SENSOR DETECTION

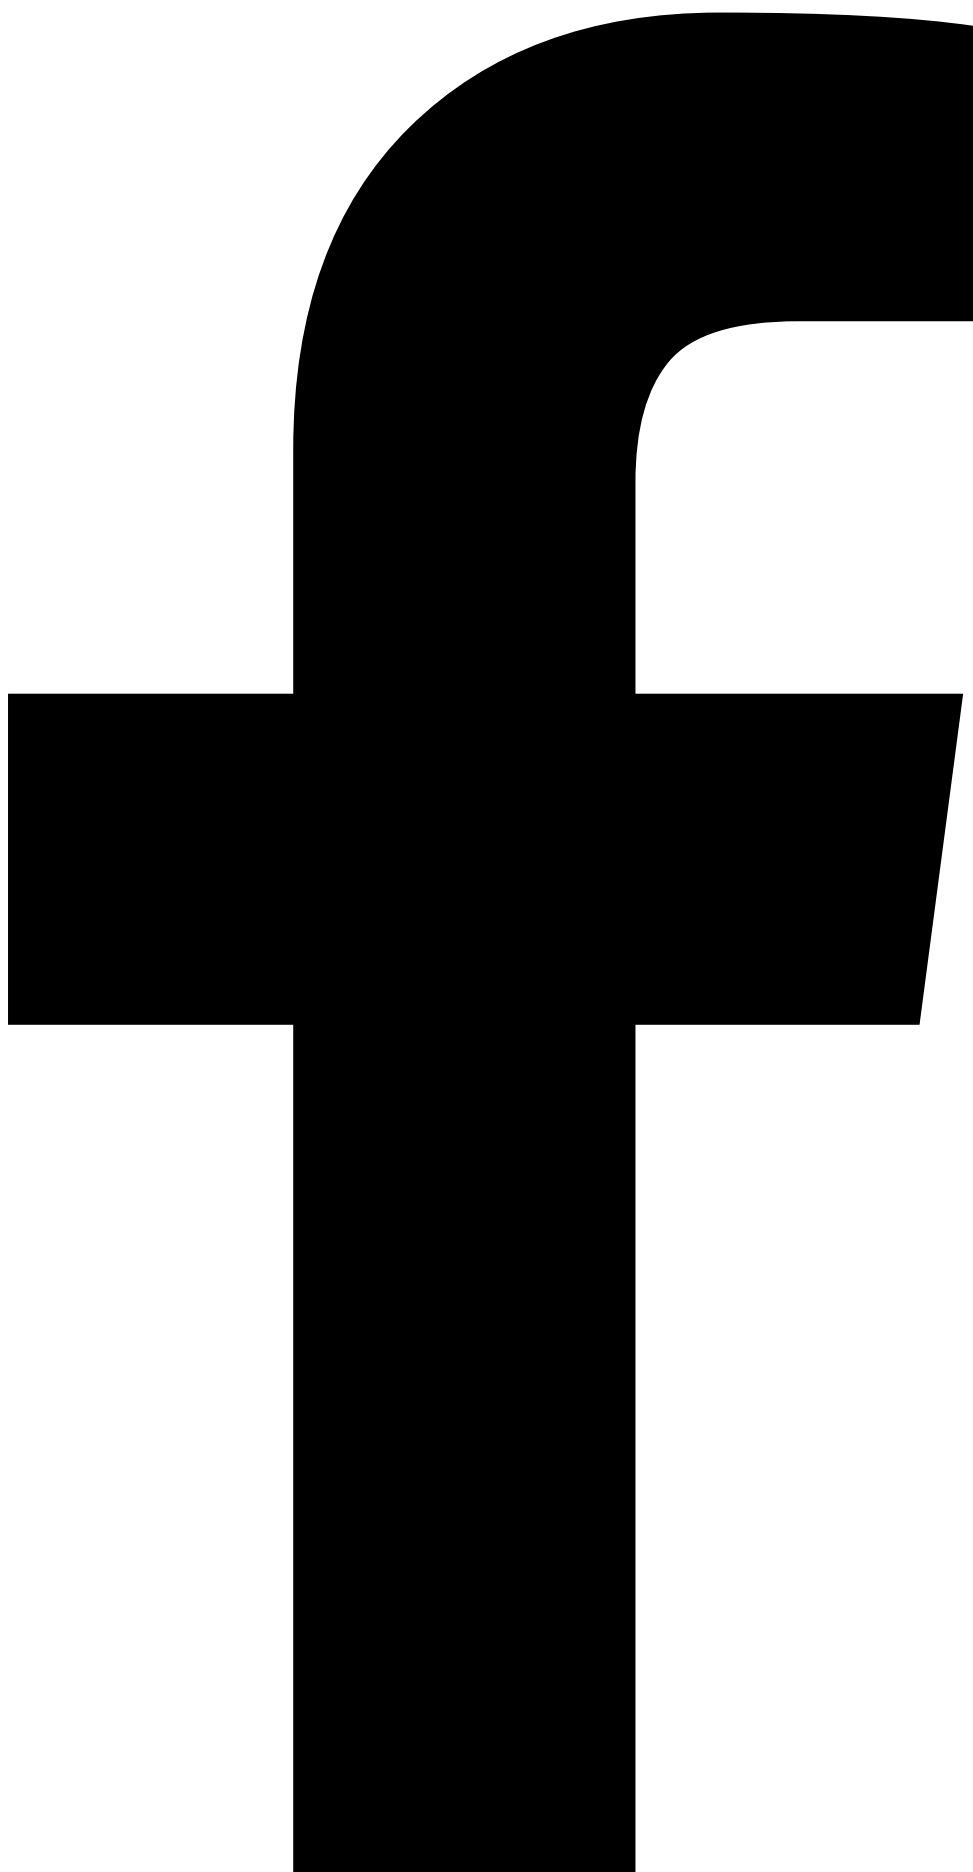

ORDER CODES

Code	Description
DTS SENF	DexTest Flush Multisensor