



# PRODUCT SPECIFICATION

---

DTS SENS



## INTRODUCTION

The DTS SENS is a surface mounted passive infrared occupancy and daylight sensor for use with the DexTest Addressable DALI system.

---

## FEATURES & BENEFITS

---

- **Mounting Type:** Surface
- **Wireless:** No
- **Maximum Mounting Height:** 5m
- **Occupancy Detection:** PIR
- **Daylight Control:** Daylight Regulation
- **Output:** DALI addressable
- **Supply Power Source:** 12V-24V DC
- **IP Rating:** IP30
- **DALI consumption:** 10mA
- **Programmer:** Commissioning Software
- **Programmer:** DexTest Software
- **Voltage:** 13V to 22.2V DC
- **Detection Diameter:** 6.6m x 5.6m at 2.5M mounting height
- **Colour:** White
- **test:** alex od

---

## ADJUSTABLE PARAMETERS

---

- **Occupied mode:** Presence/Absence
- **Occupied Level:** 1-100%
- **Occupied Time:** up to 18 hours
- **Transition Time:** up to 18 hours
- **Transition Level:** 1-100%
- **Daylight Regulation:** Enabled/Disabled
- **Grouping:** Enabled/Disabled
- More parameters available on programmer

---

## IMAGES


---



SENSOR DETECTION





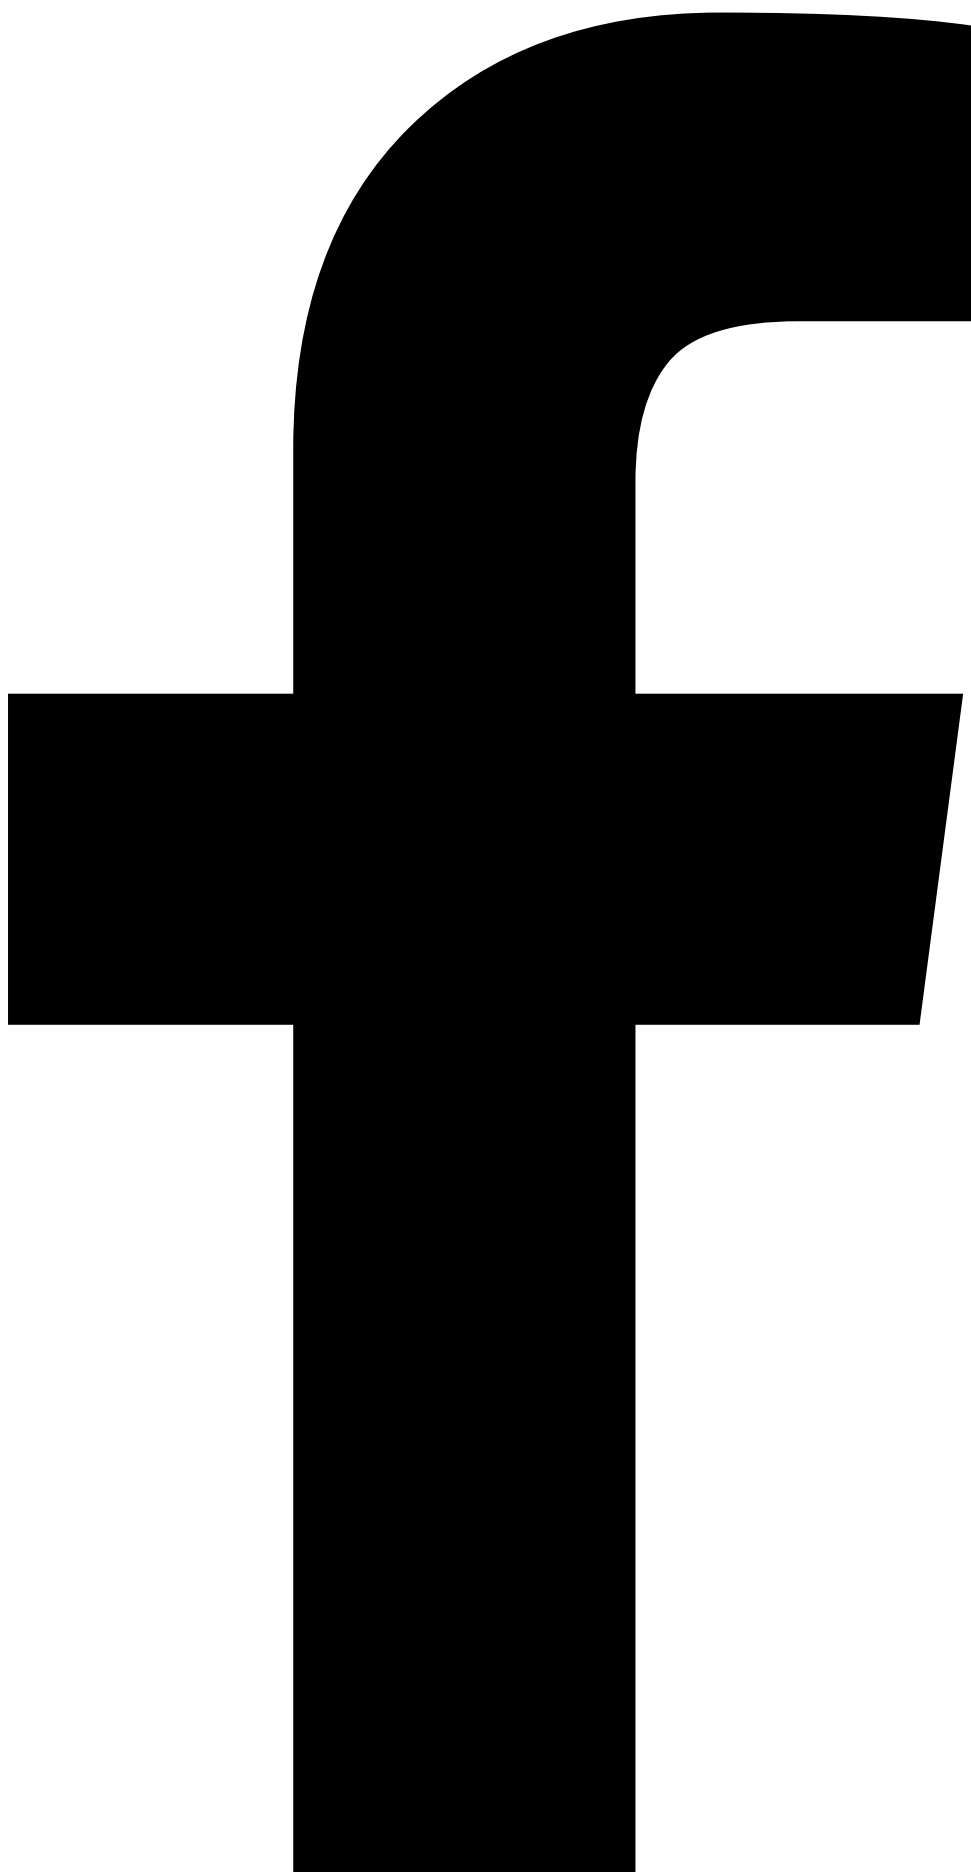

ORDER CODES

| Code     | Description                 |
|----------|-----------------------------|
| DTS SENS | DexTest Surface Multisensor |