



## PRODUCT SPECIFICATION

---

DTS SENS HB



## INTRODUCTION

The DTS SENS is a surface mounted highbay passive infrared occupancy and daylight sensor for use with the DexTest Addressable DALI system.

FEATURES & BENEFITS

- **Mounting Type:** Surface
- **Wireless:** No
- **Maximum Mounting Height:** 12m
- **Occupancy Detection:** PIR
- **Daylight Control:** Daylight Regulation
- **Output:** DALI addressable
- **Supply Power Source:** 12V-24V DC
- **IP Rating:** IP30
- **DALI consumption:** 10mA
- **Programmer:** DexTest Software
- **Voltage:** 13V to 22.2V DC
- **Detection Diameter:** 13.8m x 11.6m at 5M mounting height
- **Colour:** White

ADJUSTABLE PARAMETERS

- **Occupied mode:** Presence/Absence
- **Occupied Level:** 1-100%
- **Occupied Time:** up to 18 hours
- **Transition Time:** up to 18 hours
- **Transition Level:** 1-100%
- **Daylight Regulation:** Enabled/Disabled
- **Grouping:** Enabled/Disabled
- More parameters available on programmer


IMAGES



SENSOR DETECTION





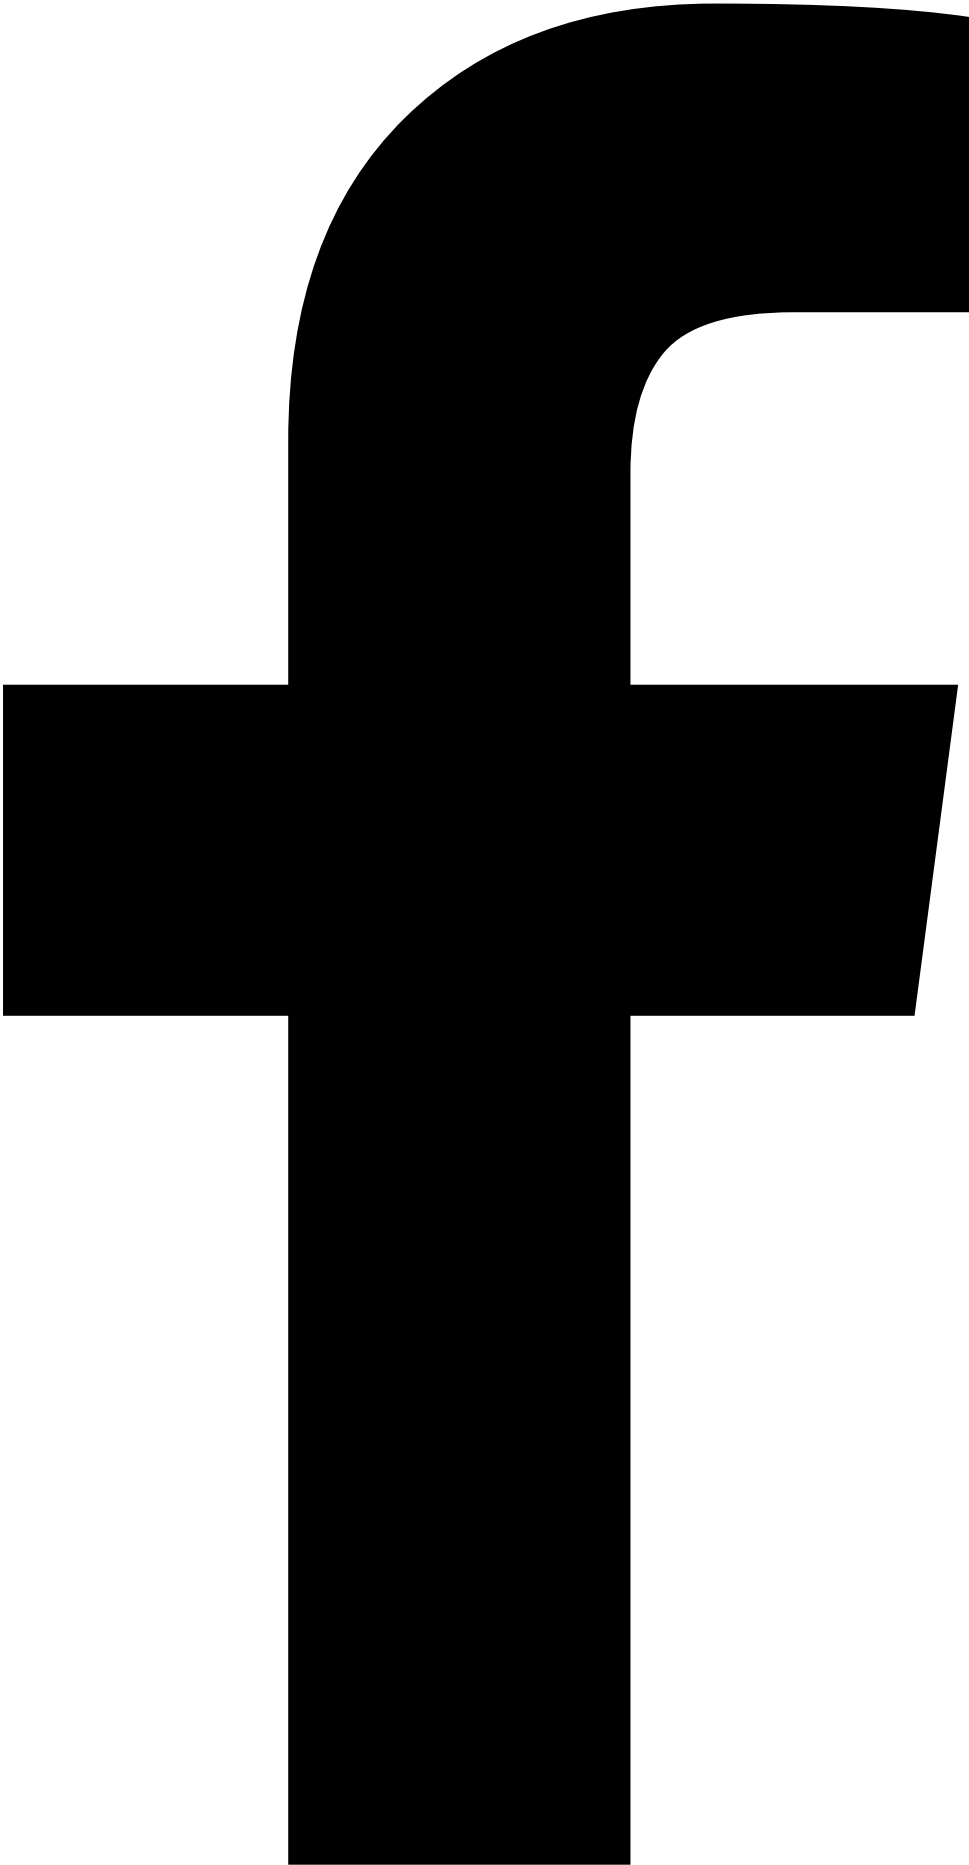

ORDER CODES

Code	Description
DTS SENS HB	DexTest Surface Highbay Multisensor