



PRODUCT SPECIFICATION

DTS SENS HB



INTRODUCTION

The DTS SENS is a surface mounted highbay passive infrared occupancy and daylight sensor for use with the DexTest Addressable DALI system.

FEATURES & BENEFITS

- Mounting Type: Surface
- Wireless: No
- Maximum Mounting Height: 12m
- Occupancy Detection: PIR
- Daylight Control: Daylight Regulation
- Output: DALI addressable
- Supply Power Source: 12V-24V DC
- IP Rating: IP30
- DALI consumption: 10mA
- Programmer: DexTest Software
- Voltage: 13V to 22.2V DC
- Detection Diameter: 13.8m x 11.6m at 5M mounting height
- Colour: White


ADJUSTABLE PARAMETERS

- Occupied mode: Presence/Absence
- Occupied Level: 1-100%
- Occupied Time: up to 18 hours
- Transition Time: up to 18 hours
- Transition Level: 1-100%
- Daylight Regulation: Enabled/Disabled
- Grouping: Enabled/Disabled
- More parameters available on programmer

IMAGES



SENSOR DETECTION

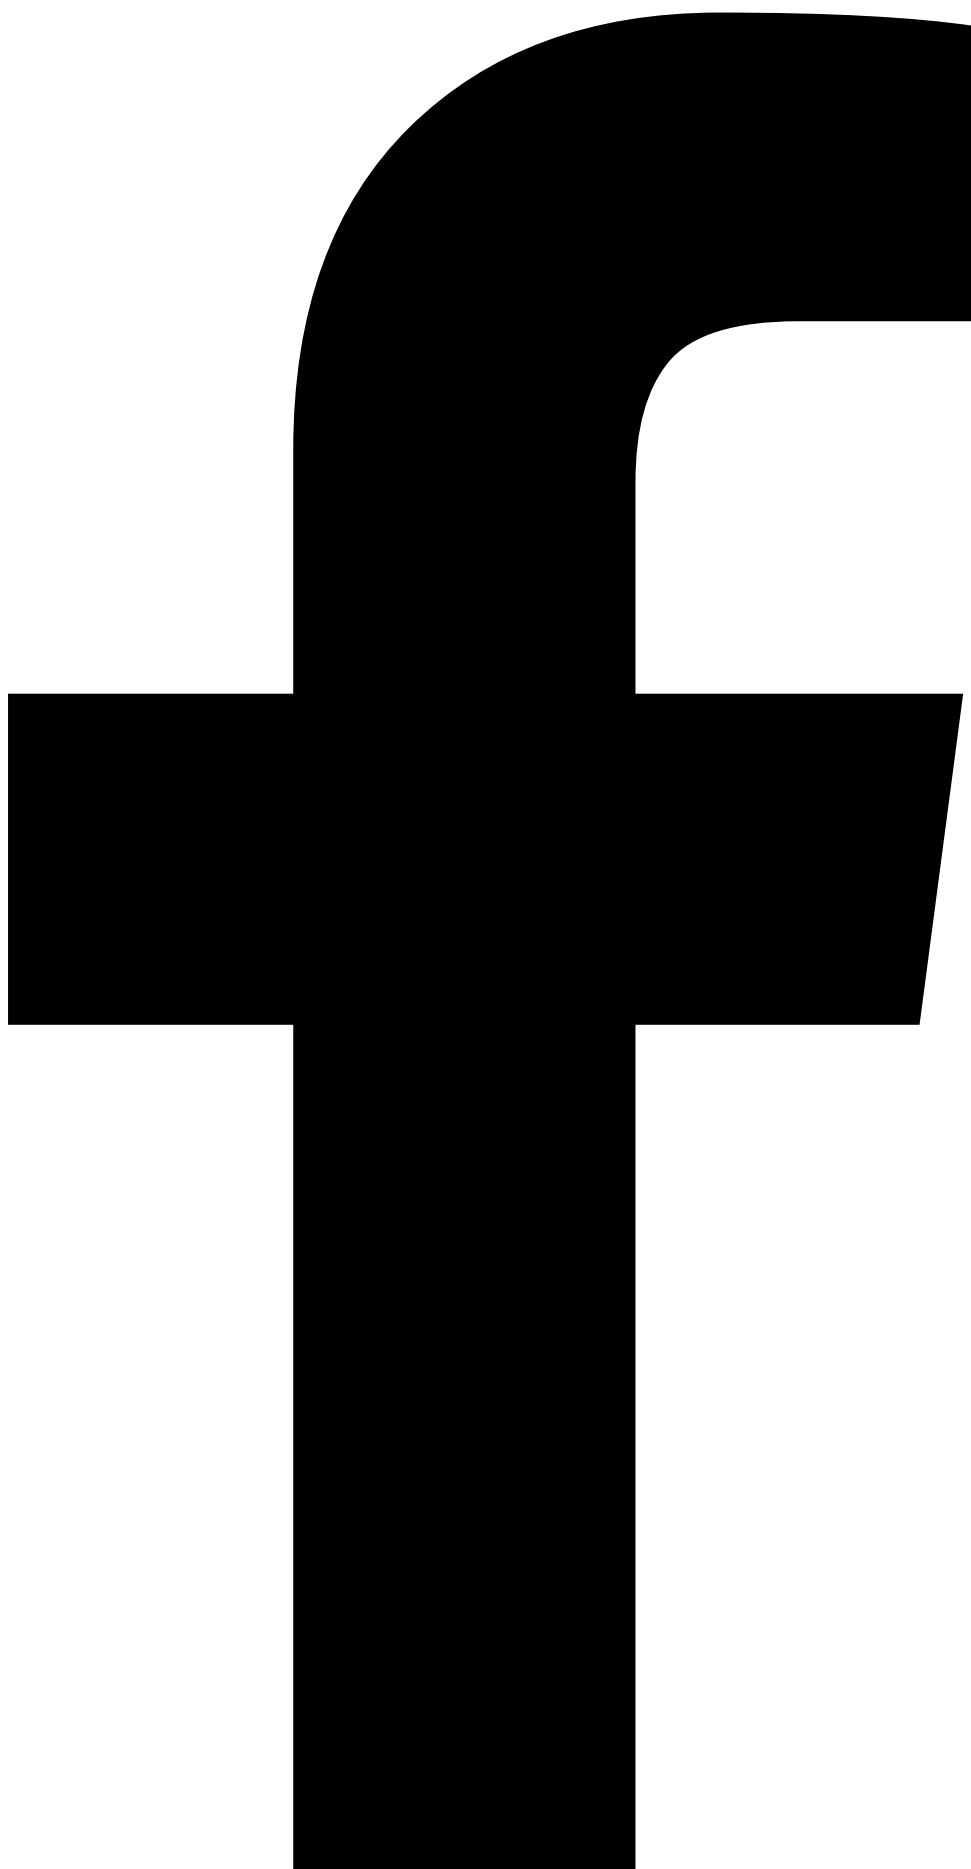

ORDER CODES

Code	Description
DTS SENS HB	DexTest Surface Highbay Multisensor