



PRODUCT SPECIFICATION

AMENITY DECORATIVE SECURE



INTRODUCTION

The Amenity Decorative Secure has been tested and certified to comply with the requirements of the Department of Health Environmental Design Guide, Adult Medium Secure Services, for use in secure applications where care must be taken to ensure that vulnerable patients are at minimal risk of harm.

With a steel housing with 3.5mm polycarbonate diffuser, the Amenity Decorative Secure has been specifically designed to ensure that the load from any impact is spread through the housing ensuring that the luminaire can withstand sustained abuse without exposing sharp edges or ligature points. When installed with anti-pick mastic to seal the luminaire to the mounting surface the Amenity Decorative Secure complies with ligature resistant requirements and is also rated to IP65 when sealed to the mounting surface and IK10.

Whilst safety and security are of the utmost concern, creating a pleasant environment for patients to aid recovery is also key with any luminaire designed for mental health applications. The Amenity Decorative Secure is available in a range of lumen outputs and dimming variants ensuring that rooms can be lit to the required levels, as well as offering optional integral lithium emergency control gear when needed.

Optional integral microwave sensors can be included allowing enhanced energy savings without compromising the strength of the luminaire including on / off, bi level dimming and wireless linked sensors for grouped luminaire operation.

UK CA	CE	IP65	IK10	TM21: L90>60K HOURS / L80>90K HOURS	3 STEP MACADAM ELLIPSE
----------	----	------	------	-------------------------------------	------------------------

APPLICATION

- Healthcare / Social Housing

SPECIFICATION

CONSTRUCTION

- Housing: Steel
- Housing: Compliant with the requirements of the Department of Health Environmental Design Guide, Adult Medium Secure Services.
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Lens: Injection moulded PMMA lens
- IK10
- IP65

;

PERFORMANCE

- Part L2 compliant
- 3SDCM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 120 luminaire lumens per circuit Watt.

;

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- All critical components are mounted on a single tray for simple end of life repair or upgrade.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

;

EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.

- Optional Reacta-Link wireless emergency for automated centralised reporting.
- Optional Reacta-Control wireless emergency for automated centralised reporting.

;

CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional Integral R25 microwave presence and bright out sensor
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

;

INSTALLATION

- Suitable for surface installation
- Retrofit in existing luminaires
- Must be installed with Anti-Pick mastic to meet ligature resistant requirements
- IP65 rated when installed to the mounting surface with mastic
- IP65 for internal use only

;


VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of lumen outputs

;

IMAGES

PRODUCT IMAGES

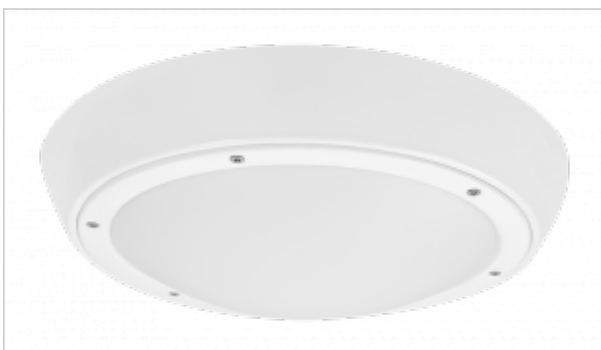


Amenity Decorative Secure

PROJECT IMAGES



TECHNICAL

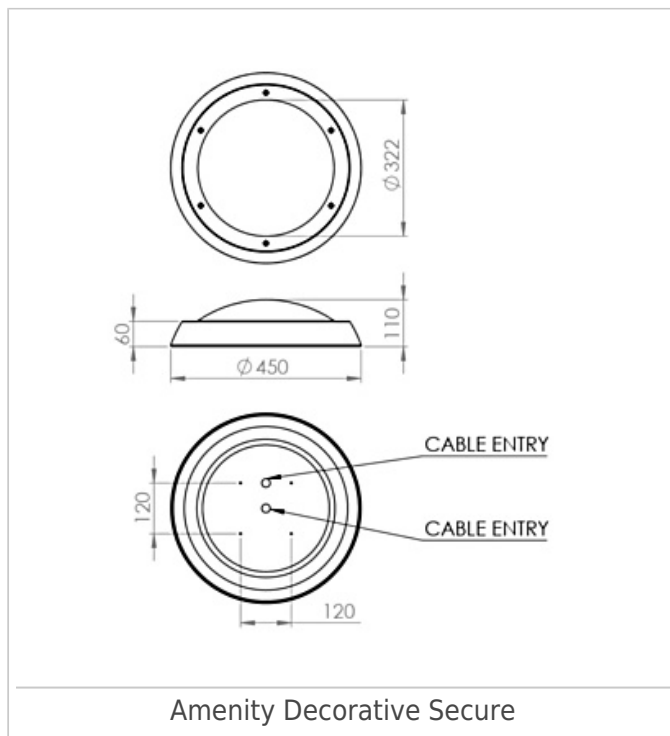

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.

- Emergency luminaires including AME LED, EXI LED, EXI3, EXI Track, HBE LED, HBE3, OAT2 LED, O EZ2 and Twinspot are supplied with a one year warranty for parts and labour. Lithium variants suffixed with the 5YR part code, the Autotest emergency with the LA3 part code and wireless variants with LA3RC or LSTR part codes are supplied with a five year warranty. For these extended warranty variants for the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday

to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

ORDER CODES

LUMINAIRE

Code	Description	Power	Llm/W
AMEDSE L15	Amenity Decorative Secure, 1,134lm, Colour 84	9.5W	119
AMEDSE L20	Amenity Decorative Secure, 1,512lm, Colour 84	13.5W	112
AMEDSE L30	Amenity Decorative Secure, 2,268lm, Colour 84	20.0W	113
AMEDSE L40	Amenity Decorative Secure, 3,024lm, Colour 84	27.2W	111

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
C	Bi-Level Dimming For Standalone Switched Sensor

CONTROL

Code	Description
R25E	Reacta 25, Presence & Bright Out, On / Off, 2.5-4M
R25C*	Reacta 25, Presence & Bright Out, Bi-Level Dimming, 2.5-4M
RLM	Reacta-Link, Wireless, Presence & Bright Out, 2.5-4M
RC	Reacta-Control, Wireless Enabled Luminaire
RCMC*	Reacta-Control, Presence & Bright Out, Bi-level Dimming, 2.5-4M
RCME	Reacta-Control, Presence & Bright Out, On / Off, 2.5-4M

*Bi-Level Dimming will only dim the luminaire to 10% during absence and brightout, it will not turn the luminaire off.

EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour
LSTR	Lithium Reacta-Link Emergency 3 Hour
LA3RC	Lithium Reacta-Control Emergency 3 Hour
CB	Central Battery, Please Specify 110V or 230V when Ordering

MISCELLANEOUS

Code	Description
C**	Select Colour Temperature and Rendering; C827, C83, C85, C865, C93, C94

AMENITY DECORATIVE SECURE

PRODUCT SPECIFICATION

NL	Night Light (Non Emergency Variants Only)
LSF	Low Smoke Zero Halogen

220-240V / 50-60Hz

IP65

IK10




Terminal Labelling:

Power	
L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
Dimming	
-D1/DA	Analogue/DSI/DALI
+D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function

WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.



1.




The luminaire is delivered fully assembled, this will need to be opened for installation and electrical termination.

2.

Unscrew the security screws using a Pin Recess T Drive. This will release the diffuser retaining ring.

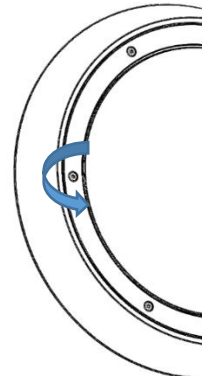


3.

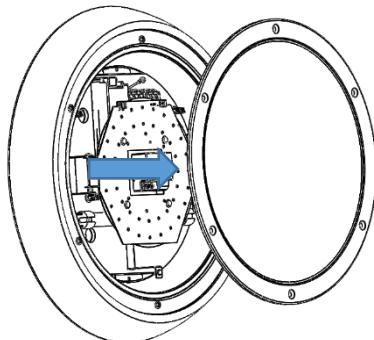


Remove the retaining ring and front diffuser to gain access to the terminal block.

4.

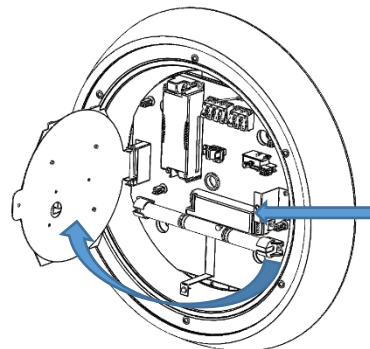

Undo the fixing screw in order to flip the LED board out of the way. This will allow access to the terminal block and fixing holes.


5.

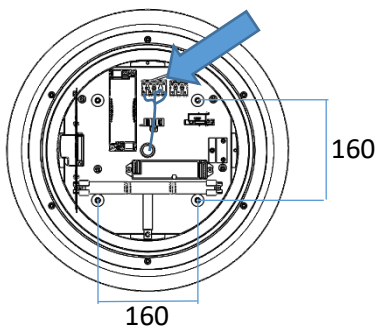


Bring power supply through central grommet and connect it to the terminal block. Then secure the housing to the wall using the 4 fixing points on the back side of the fitting.

6.

Ensure luminaire is flush to the surface and securely mounted to maintain the vandal resistance.

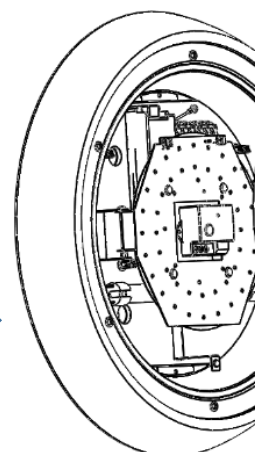



7.




Flip the LED board back and secure in place using the fixing screw. Offer the diffuser and retaining ring up to the housing.

8.

Tighten the security screws using a Pin Recess T Drive. Ensure that the screws are tightened completely and that fitting is secure.

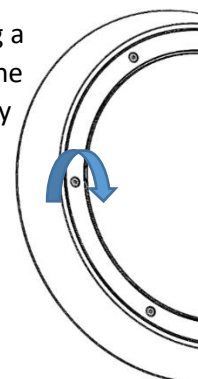

9.







Run Anti-Pick Mastic around the profile of luminaire to ensure the fitting is secure. Must be installed with **anti pick mastic** to meet ligature resistant requirements.

10.

Maintenance

- 1 Disconnect luminaire before undertaking any maintenance or cleaning.
- 2 Cleaning should be undertaken on external parts of the luminaire only using a slightly damp lint free cloth.
- 3 To access fitting use a Pin Recess T Drive to remove all screws from housing.
- 4 Use a pan pozi screwdriver to remove gear tray and components from housing.
- 5 Please contact Dextra for assistance with spare component supply.

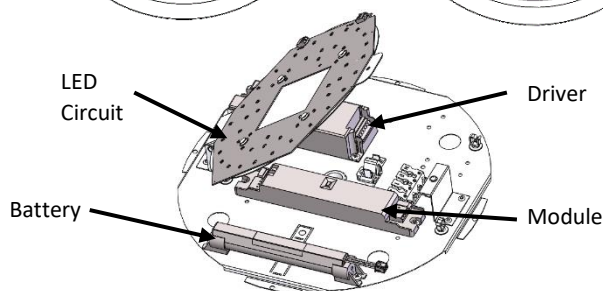

T e s t R e p o r t

Report No : L18900 Amd1

Client: : Dextra Group Ltd
Brickfields Business Park
Gillingham
Dorset
SP8 4PX

Description : Amenity Decorative Secure Luminaire

Manufacturer : Dextra Group Ltd

Type/Model : AMEDSE


Test Specification : Environmental design guide adult medium secure services
Annex B: Testing Levels
Type 1, Type 2, and Type 4

Date Testing Started : 02/10/2019, Reviewed 29/11/2023

Conclusion : Refer to body of report

Date of Issue : 01/12/2023

Tested by: K. MERRILLS
Position: Laboratory Engineer

DocuSigned by:

86EA3206DE44418...



Approved: J. ADAMS
Position: Laboratory Manager

DocuSigned by:

C55F2E09C1D7448...

INTRODUCTION

Dextra Group Ltd have supplied the technical drawings for the product identified in Table 1. for evaluation in accordance with the specification detailed on page one of this report.

Note: This amendment 1 is to review and re-issue the report. The test specification and product specifications have not changed since initial test.

PRODUCT DETAILS

Table 1. Test Sample Details

Product Description	Amenity Decorative Secure Luminaire
Model No.	AMEDSE
Number of Samples	One
Condition on Receipt	Good
Nominal Dimensions	L 500mm x W500mm x H150mm
Product Supply Requirement	220-240V 50/60Hz
Lamp Type and Power	LED Module
Sampling Method: Test samples selected and supplied by client; no sampling method specified by client.	

TEST PROCEDURE

The testing was carried out as per Environmental design guide adult medium secure services Annex B: Testing Levels Type 1, Type 2 and Type 4

Type 1: An attack on a component or element of construction using an implement or weapon.

The product was mounted as per instructions and attacked by the mean of 36X36X100 mm hardwood shaft (density 660kg/m³) chamfered at one end to replicate the jagged edge/arises/etc of a vandalised component, to be planed and all arises rounded.

The product was subjected to sustained attacked for a period of 15 minutes (maximum potential period for a patient to work undetected on a component, notwithstanding the noise that this would create), including hitting with the flat section of the weapon a minimum of 10 consecutive blows, attacking end-on with the non-chamfered end of the weapon for a minimum of 10 consecutive blows and, where testing a component, prizing away from the structure to which it is fixed by the chamfered end of the weapon (the latter applies to the whole or any part of the component).

Continued on following page

TEST PROCEDURE

Type 2: Attack by punching or kicking.

The product was mounted as per instructions and attacked by the means of 1.2 kg rubber mallet (75 mm).

The product was subjected to a sustained attack with implement comprising of 15 consecutive blows commencing each blow with the implement withdrawn a minimum of 1000 mm away from the component/element of construction.

Type 4: The testing of the item and its fixings up to and including destruction.

The product was mounted as per instructions and attacked by appropriate tools and equipment or items that a patient may be able to obtain or have access to. (For example, a metal teaspoon, zip components, metal spring from hi-fi headsets, etc).

The product was subjected to a sustained attack for a period of 45 minutes or until the item or its fixings fail, whichever is the soonest.

The product complies with the above requirement as

- It exhibits no significant failure resulting in the removal of the whole or part of the component
- It did not break, or fracture enabling its use as a weapon or means of self-harm
- There was no escape or exposure to live electrical wiring, high-temperature pipe work or any other vulnerable services.

Continued on following page

RESULTS

Type 1. An attack on a component or element of construction, using an implement or weapon.

The sample was deemed to comply with the requirements because, after the test, there were no visible damages to the Luminaire and no live parts were accessible.

Type 2. An attack on a component or element of construction, using punching or kicking.

The sample was deemed to comply with the requirements because, after this test, there were no visible damages to the Luminaire and no live parts were accessible.

Type 4. The testing of the item and its fixings up to and including destruction.

The sample was deemed to comply with the requirements because, after this test, there were no visible damages to the Luminaire, no sharp edges exposed, and no live parts accessible.

Therefore, the sample was deemed to comply with the requirements.

Continued on following page

ILLUSTRATION



Figure 1. *Product Image*



Figure 2. *Test Setup*

Continued on following page

This page is to be read in conjunction with the first page of this report



Figure 3. *Product Image after the test*

End