


## PRODUCT SPECIFICATION

---

INTERCONNECTING LEAD (NON-DIMMABLE LUMINAIRE)

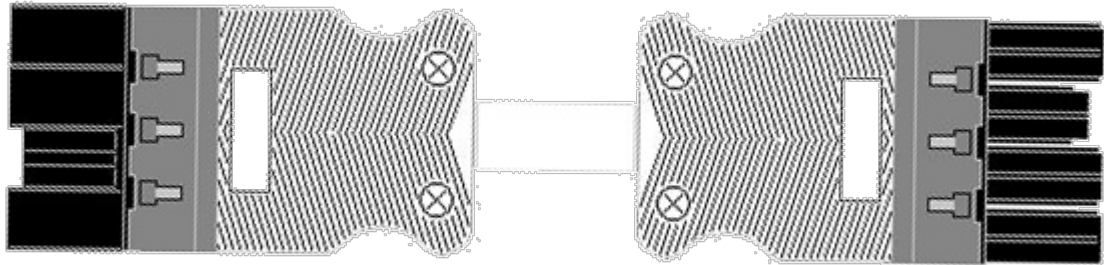

---

## INTRODUCTION

---

Lead to connect Non-dimmable luminaire to Non-dimmable luminaire - black 4 pole male non-locking luminaire connector to 4 pole female black non-locking luminaire connector, 4 x 1.5mm<sup>2</sup> conductor cores.

## FEATURES & BENEFITS

Compatible with:

Luminaires fitted with 4 pole panel mount (4PM).

Note: C3801 - 4 Pole "T" piece may be required when interconnecting luminaires.

## IMAGES



## ORDER CODES

### LEAD

Code	Description
FF 4PM 4P3M 4PF	Lead - Luminaire interconnecting, 3 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
FF 4PM 4P4M 4PF	Lead - Luminaire interconnecting, 4 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
FF 4PM 4P5M 4PF	Lead - Luminaire interconnecting, 5 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
FF 4PM 4P6M 4PF	Lead - Luminaire interconnecting, 6 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
FF 4PM 4P7M 4PF	Luminaire interconnecting, 7 metres long with 4 pole male black non-locking connector to 4 pole female black non-locking connector
FF 4P TPIECE	4 pole black T piece - one T piece required to be plugged into each luminaire with a 4 pole panel mount (4PM) that has an interconnect lead fed out to the next luminaire.