



PRODUCT SPECIFICATION

CAPO XL



INTRODUCTION

The Capo XL is a modern take on the classic Highbay luminaire used in countless warehouse, manufacturing and retail applications around the country. The Capo XL provides a modern and attractive appearance with similar lumen output to traditional 250W and 400W HID luminaires with typically half the energy consumption and minimal maintenance requirements ensuring that the Capo XL provides rapid return on investment in the vast majority of applications. With a matt grey or white aluminium rear housing, a translucent collar available in a range of colours and opal refractor the Capo XL can also be customised to suit any corporate theme.

The Capo XL is available in three lumen outputs, 6,513lm, 12,676lm and 17,718lm luminaire lumens ensuring it can be used as an effective replacement for the majority of HID sources and is also available in dimming and lithium emergency variants eliminating the need for costly separate emergency lighting systems. We offer a range of wireless control systems providing localised grouping and control as well as comprehensive wireless solutions allowing both standard and emergency luminaires to be centrally monitored.

UK CA	CE	IP20	TM21: L90>60K HOURS / L80>90K HOURS	3 STEP MACADAM ELLIPSE
----------	----	------	-------------------------------------	------------------------

CAPO XL - APPLICATION

- Industrial / Manufacturing
- Retail
- Warehouse / Storage

CAPO XL - SPECIFICATION

CONSTRUCTION

- Housing: Spun aluminium
- Finish: Matt grey
- Diffuser: Injection moulded high transmission opal polycarbonate
- IP20
- Translucent collar available in a range of colour options.

PERFORMANCE

- Part L2 compliant
- 3SDCM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 85 luminaire lumens per circuit Watt.

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.
- Optional Reacta-Link wireless emergency for automated centralised reporting.
- Optional Reacta-Control wireless emergency for automated centralised reporting.

CONTROL

- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

INSTALLATION

- Suitable for suspended installation
- Supplied complete with single point suspension kit allowing for simple replacement of traditional highbay luminaires.

VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of lumen outputs
- Available with a range of collar colours

CAPO XL - IMAGES



Capo XL Grey Housing



Capo XL White Housing



Capo XL Black Housing



Capo XL Opal Collar




Capo XL Green Collar



Capo XL Orange Collar




Teddington School using the Capo XL

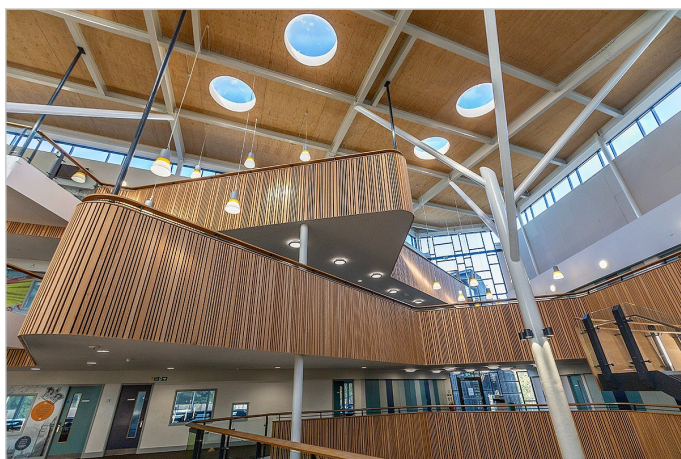

Teddington School using the Capo XL



Caernarfon Station using the Capo XL

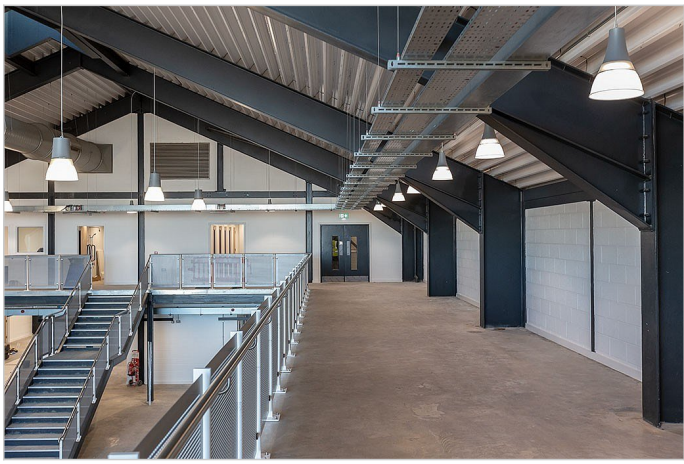


Queens Market, Rhyl using the Capo XL




Caernarfon Station using the Capo XL



A leisure centre using the Capo XL

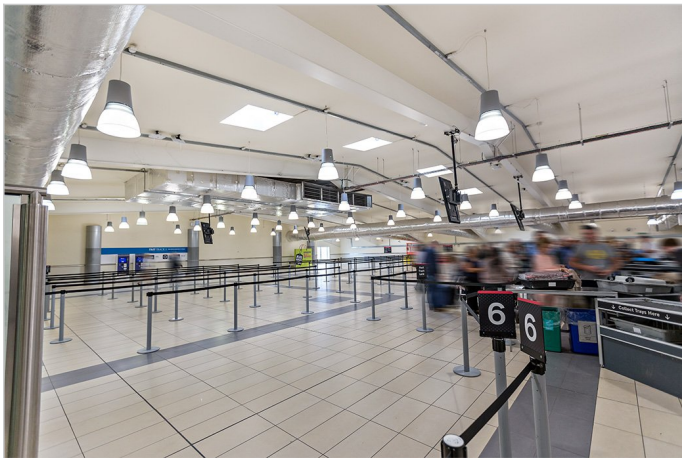

Liverpool John Lennon airport using the Capo XL

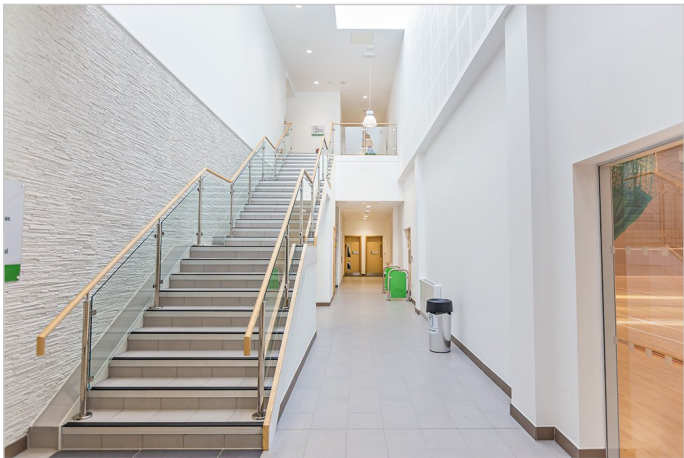

Workington Leisure Centre using the Capo XL and Protec LED



A leisure centre using the Capo XL



A library using the Capo XL




A library using the Capo XL



A library using the Capo XL



De Montfort University using the Capo XL

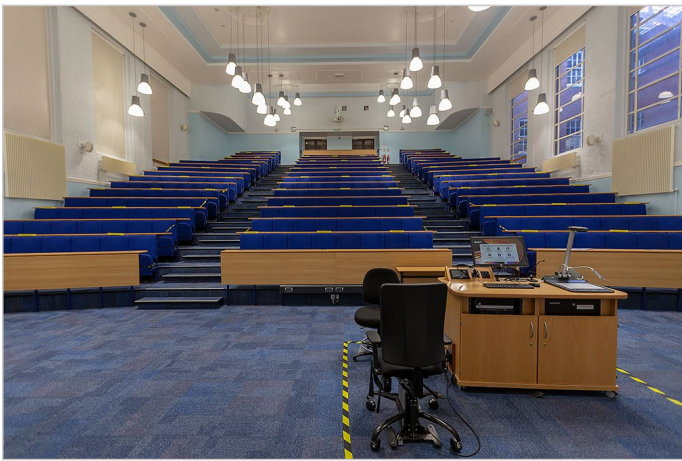

De Montfort University using the Capo XL



A supermarket using the Capo XL




A supermarket using the Capo XL




A supermarket using the Capo XL



A supermarket using the Capo XL

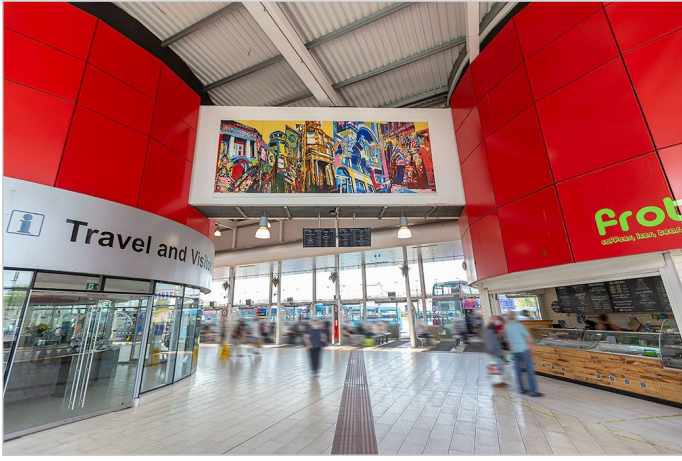

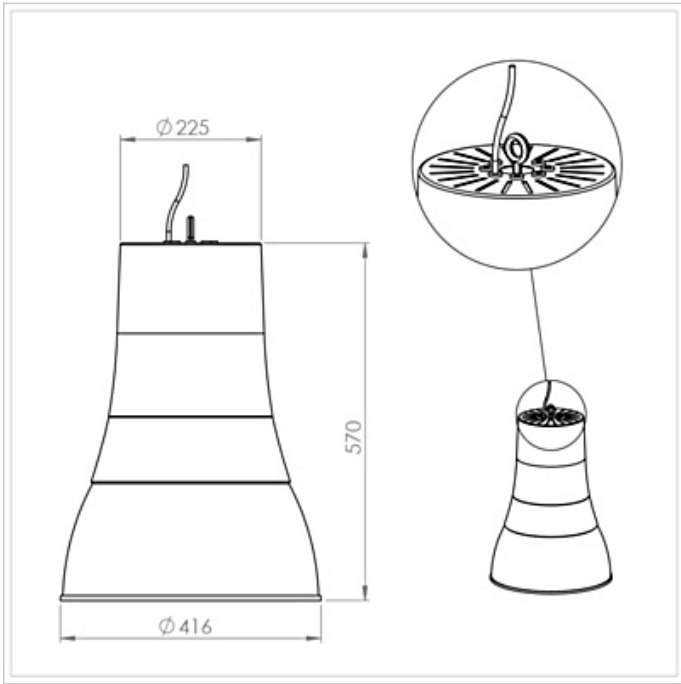

Capo XL

CAPO XL – WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot are supplied with a one year warranty for parts and labour. Lithium variants suffixed with the 5YR part code, the Autotest emergency with the LA3 part code and wireless variants with LA3RC or LSTR part codes are supplied with a five year warranty. For these extended warranty variants for the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.

- The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

CAPO XL - ORDER CODES

LUMINAIRE CODES

Code	Description	Power	Llm/W
CAP XL L80	Capo XL, 6,513llm, Grey Housing, Colour 84	52.2W	125
CAP XL L160	Capo XL, 12,676llm, Grey Housing, Colour 84	104.5W	121
CAP XL L240	Capo XL, 17,718llm, Grey Housing, Colour 84	153.0W	116
Supplied with suspension kit			

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
C	Bi-Level Dimming For Standalone Switched Sensor

The Capo XL L160 uses two drivers and the L240 uses three drivers requiring an address per driver on the DALI network.

DSI is not available in L80 variants.

CONTROL

Code	Description
RLI	Reacta-Link, Wireless Enabled Luminaire
RC	Reacta-Control, Wireless Enabled Luminaire

[Please click here for full details on our wireless controls.](#)

EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour
LSTR	Lithium Reacta-Link Emergency 3 Hour
LA3RC	Lithium Reacta-Control Emergency 3 Hour

MISCELLANEOUS

Code	Description
C**	Select Colour Temperature and Rendering; C83, C84, C865, C93, C94
WH	White Finish
BL	Black Finish
RED	Red Collar
ORA	Orange Collar
GRN	Green Collar
BLE	Blue Collar
OP	Opal Collar
LSF	Low Smoke Zero Halogen

Collar colours may be subject to minimum order quantity

Capo / Capo XL Installation

220-240V / 50-60Hz
IP20




Terminal Labelling:

Power	
L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
Dimming	
-D1/DA	Analogue/DSI/DALI
+D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function




WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer itself or his service agent or a similar qualified person. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.


1.

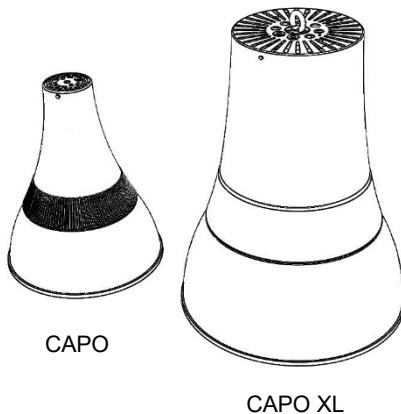


2.

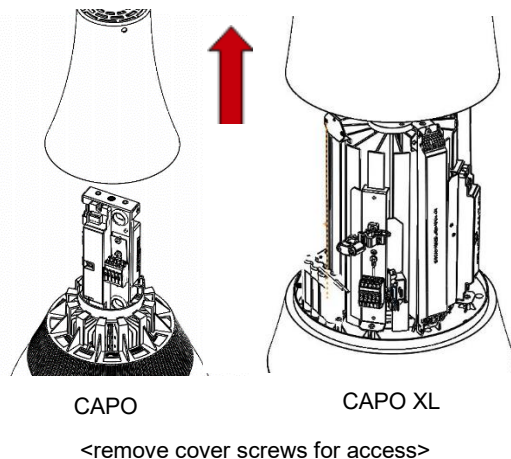


3.

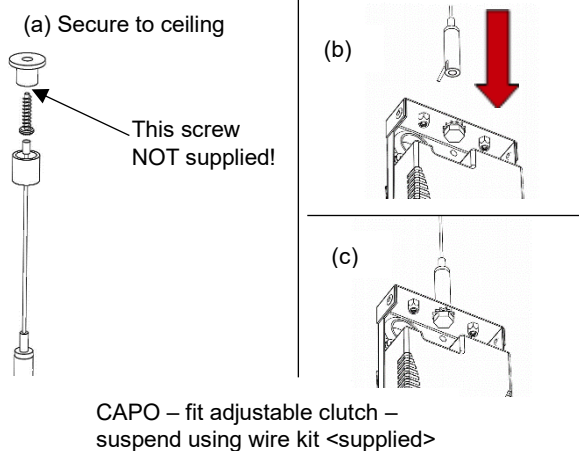


4.

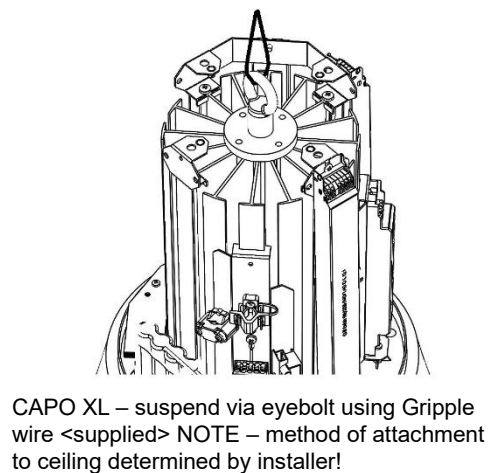


5.

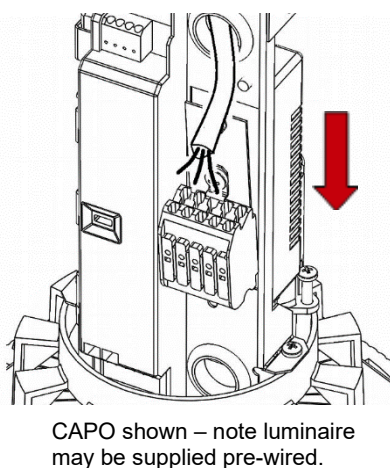

6.

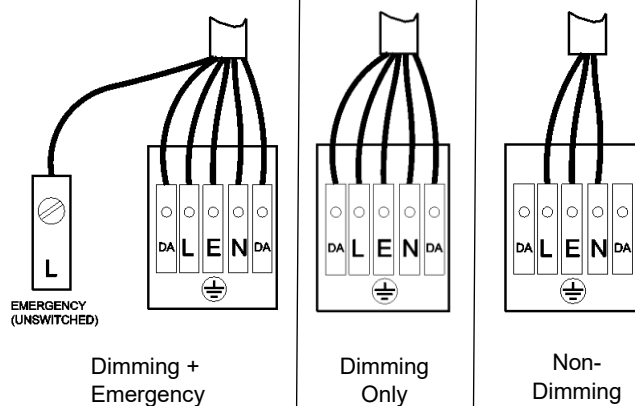


7.




Cable must be clamped! - CAPO

8.




Cable must be clamped! – CAPO XL

9.



CAPO

10.

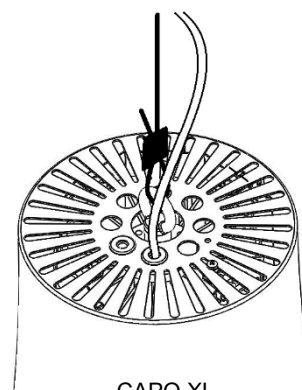


CAPO XL

11.



12.

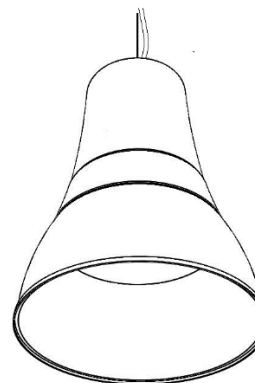

13.

NOTE:
For emergency variants it is necessary to isolate both switched and permanent live supplies to view the emergency source and verify operation

14.

Maintenance

- 1 Disconnect luminaire before undertaking any maintenance or cleaning.
- 2 Cleaning should be undertaken on external parts of the luminaire only using a slightly damp lint free cloth.
- 3 To remove cover use a pan pozi screwdriver to remove screws from top of fitting.
- 4 If replacing the LED circuit make sure to remove all thermal paste from all mating surfaces and reapply.
- 5 Use a flat headed screwdriver to lever the LED safety cover up.
- 6 Use a pan pozi screwdriver to remove screws from the outer ring on LED circuit.
- 7 To remove screws from LED circuit use a torx screwdriver.
- 8 Use a pan pozi screwdriver to remove components.
- 9 Please contact Dextra for assistance with spare component supply.

