



# PRODUCT SPECIFICATION

---

CHROMIX POINT



---

## INTRODUCTION

---

The Chromix point is a fantastic solution for compact colour change spot and flood lighting applications. Remote DMX decoder and remote driver both help to enable a visually pleasing and compact luminaire body. Being more compact than a conventional product of this kind means the Chromix Point can easily be mounted in a myriad of locations.

The Chromix Point is 6.6 beam angle as standard and is supplied with 10°, 20° and 30° spread lenses. The Chromix Point is also supplied complete with a DMX decoder and is supplied with a marine grade paint finish ensuring suitability for both inland and coastal areas.

**UK  
CA** CE IP67 IK08 48V

---

## APPLICATION

---

- ▶ Accent Lighting
- ▶ Display Lighting
- ▶ Exterior
- ▶ Hotel / Leisure
- ▶ Parking / Exterior
- ▶ Retail

---

---

## SPECIFICATION

---

### CONSTRUCTION

- › Housing: High pressure die cast aluminium
- › Finish: Polyester powder painted RAL 9006 matt grey, marine grade salt spray tested
- › Diffuser: 5mm toughened glass
- › Lens: Injection moulded PMMA lens
- › IK08
- › IP67 ingress protection

### EMERGENCY

- › Not available with emergency

### CONTROL

- › RGBW Colour Changing
- › DMX dimming only

### INSTALLATION

- › Suitable for surface installation
- › Suitable for external surface installation

### VARIATIONS

- › Available in a range of lens options offering multiple beam angles

---

## IMAGES

---

### PRODUCT IMAGES



Chromix Point



Chromix Point with lit effect



Chromix Point with spread lens



Chromix Point



Chromix Point with spread lens

## PROJECT IMAGES




---


## TECHNICAL

---




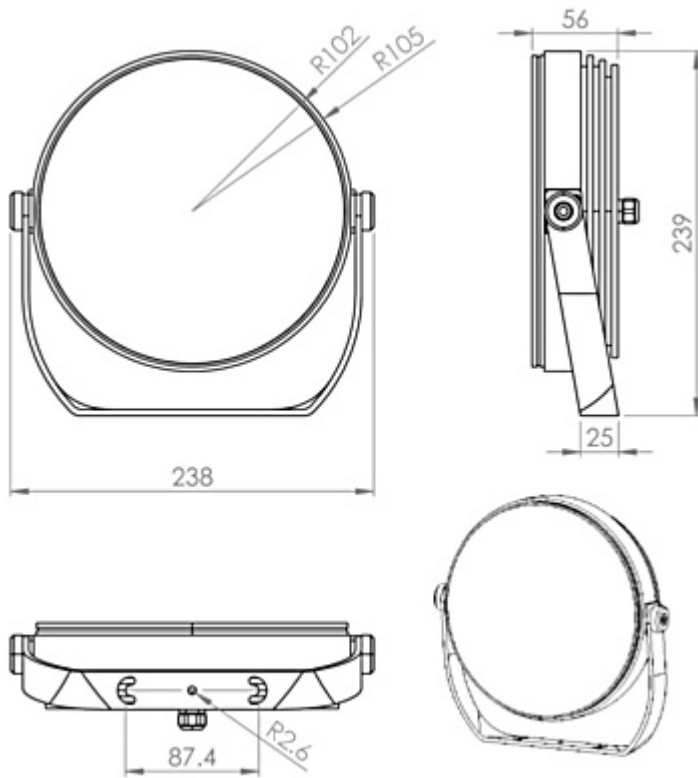

Chromix Point

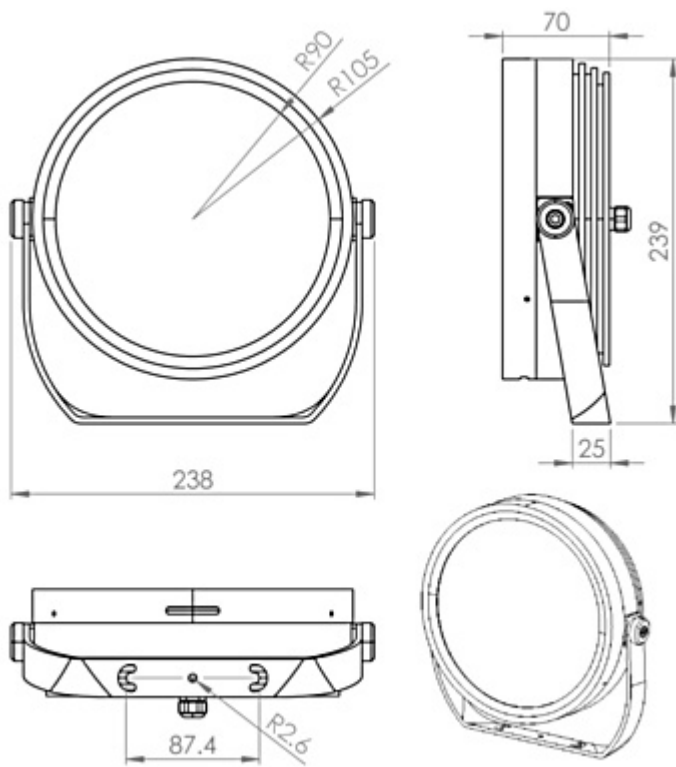

Chromix Point with Spread Lens

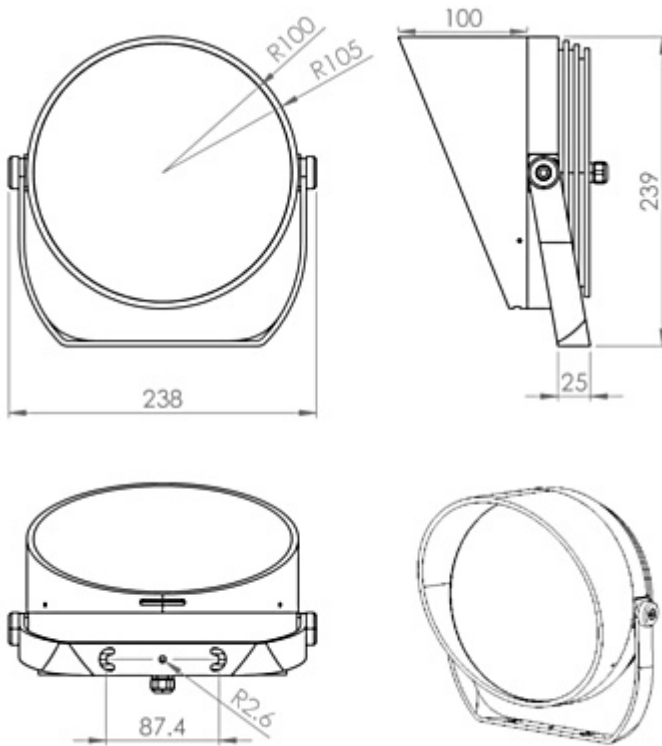

Chromix Point with Glare Shield

## WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.

- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

**If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.**

## ORDER CODES

## LUMINAIRE

Code	Description	Power	Luminous Flux
CHP 50 06 RGBW GY MG	Chromix Point 50W RGBW C84, 210mm Diameter, 6°, IP66, IK08, 48V complete with CHP SL - spread lens kit 10°/20°/30°	50.0W	
	Spread lens kit 10°	72.5W	242lm Red, 453lm Green, 748lm Blue, 536lm White, 1,979lm RGBW
	Spread lens kit 20°	72.5W	238lm Red, 447lm Green, 752lm Blue, 530lm White, 1,967lm RGBW
	Spread lens kit 30°	72.5W	251lm Red, 470lm Green, 779lm Blue, 557lm White, 2,057lm RGBW
CHP GS	Chromix Point Glare Shield*		
CHP DMX DECODER	CHP DMX Decoder		

\*Cannot be used with spread lens

Also available in static white in a range of colour temperatures. Please contact LEDextra for further information.



220-240V / 50-60Hz

IP67


IK08



Terminal Labelling:	
<b>Power</b>	
L1	Switched Live
E	Earth
N	Neutral
<b>Emergency</b>	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
<b>Dimming</b>	
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function


**WARNING:** Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non user replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1.

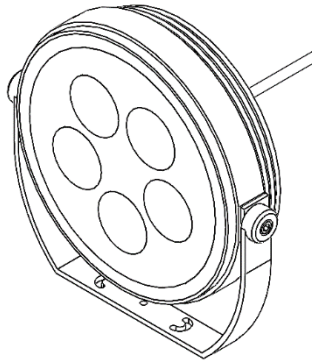


Fitting will come complete and ready to install.

2.




Secure the bracket to a suitable mounting surface.

3.

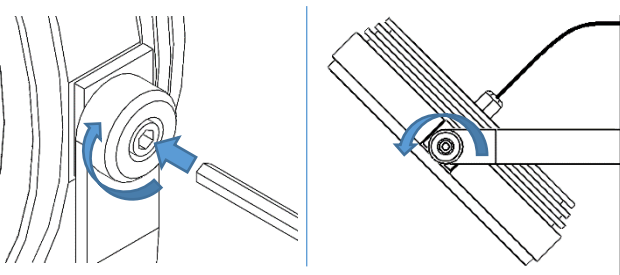


To adjust the angle of the bracket, use an Allen key to loosen the hex bolts on the sides. Retighten these bolts once at the desired angle.

4.

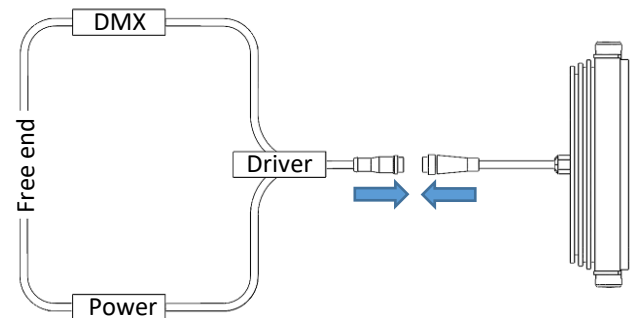


Connect the fitting to the driver. Then establish a connection with the free end of the cable.

5.



Installation is now complete.

6. **Spread Lens Kit Installation**

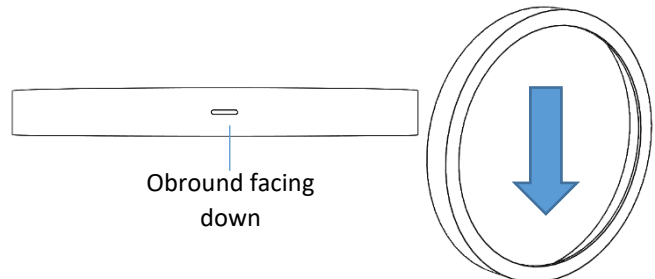

Ensure obround on spread lens kit is facing down to aid drainage.