



PRODUCT SPECIFICATION

R37DS SENSOR



INTRODUCTION

The Reacta 37 - R37DS sensor is a surface mounted standalone photocell dimming sensor for controlling digitally dimmable luminaires.

FEATURES & BENEFITS

- **Mounting Type:** Surface
- **Wireless:** No
- **Maximum Mounting Height:** 10m
- **Daylight Control:** Daylight Regulation
- **Output:** DALI
- **Supply Power Source:** 230V
- **IP Rating:** IP20
- **Programmer:** REA AP



ADJUSTABLE PARAMETERS

- **Occupied Level:** 1-100%
- **Transition Time:** up to 60 minutes or forever
- **Transition Level:** 1-100%
- **Daylight Regulation:** Enabled/Disabled
- **Bright Out Mode:** Enabled/Disabled
- **Daylight Regulation level:** up to 1000Lux
- More parameters available on programmer

IMAGES



DIAGRAMS

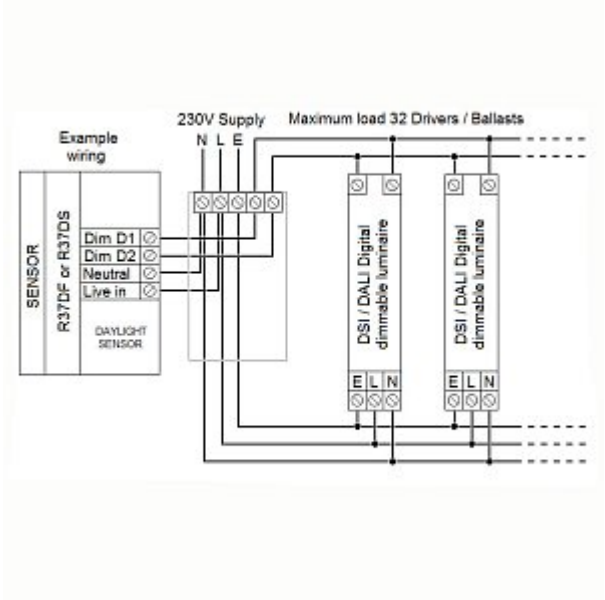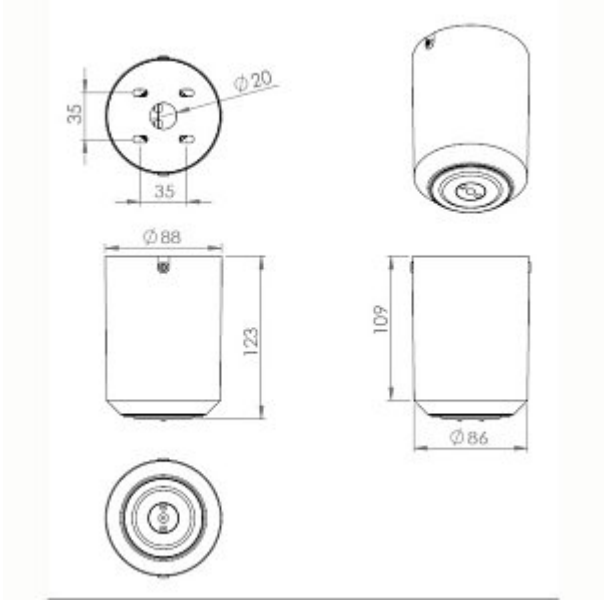

ORDER CODES

Code	Description
R37DS	Reacta 37 Sensor, Surface Mounted, Standalone, Photocell Dimming, Digital Dimming