



# PRODUCT SPECIFICATION

---

R37DS SENSOR



---

## INTRODUCTION

---

The Reacta 37 - R37DS sensor is a surface mounted standalone photocell dimming sensor for controlling digitally dimmable luminaires.

---

## FEATURES & BENEFITS

---

- Mounting Type: Surface
- Wireless: No
- Maximum Mounting Height: 10m
- Daylight Control: Daylight Regulation
- Output: DALI
- Supply Power Source: 230V
- IP Rating: IP20
- Programmer: REA AP

---

## ADJUSTABLE PARAMETERS

---

- Occupied Level: 1-100%
- Transition Time: up to 60 minutes or forever
- Transition Level: 1-100%
- Daylight Regulation: Enabled/Disabled
- Bright Out Mode: Enabled/Disabled
- Daylight Regulation level: up to 1000Lux
- More parameters available on programmer

---

## IMAGES


---



---

## DIAGRAMS

---

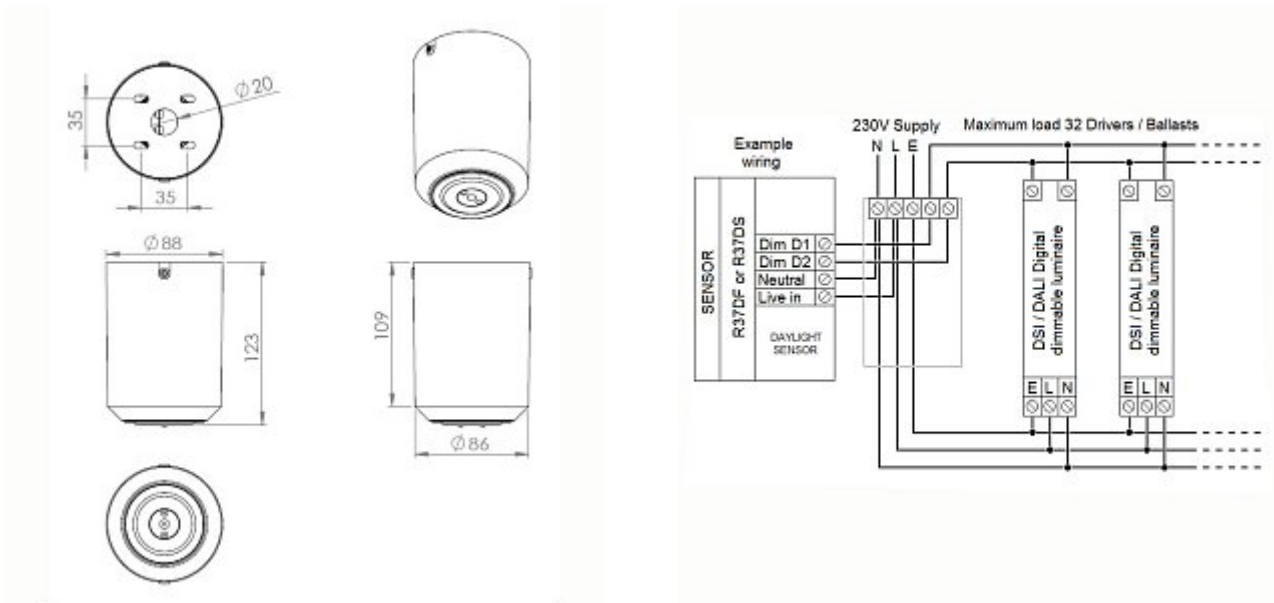

## ORDER CODES

Code	Description
R37DS	Reacta 37 Sensor, Surface Mounted, Standalone, Photocell Dimming, Digital Dimming