

R43 SENSOR







INTRODUCTION

The Reacta 43 – R43 sensor is a recessed flush mounted standalone passive infrared sensor with bright out function, presence or absence detection to control fixed output (non dimmable) high frequency luminaires. Please note that the REA-R43 controller is required to adjust settings with this sensor.

FEATURES & BENEFITS

• Mounting Type: Recessed

• Wireless: No

• Maximum Mounting Height: 5m

Occupancy Detection: PIR

• Daylight Control: Bright Out

• Output: On/Off

• Supply Power Source: 230V

• IP Rating: IP20

• Programmer: REA AP

ADJUSTABLE PARAMETERS

Occupied mode: Presence/Absence
Occupied Time: Up to 30 minutes
Bright Out Mode: Enabled/Disabled

• More parameters available on programmer


IMAGES






DIAGRAMS





SENSOR DETECTION

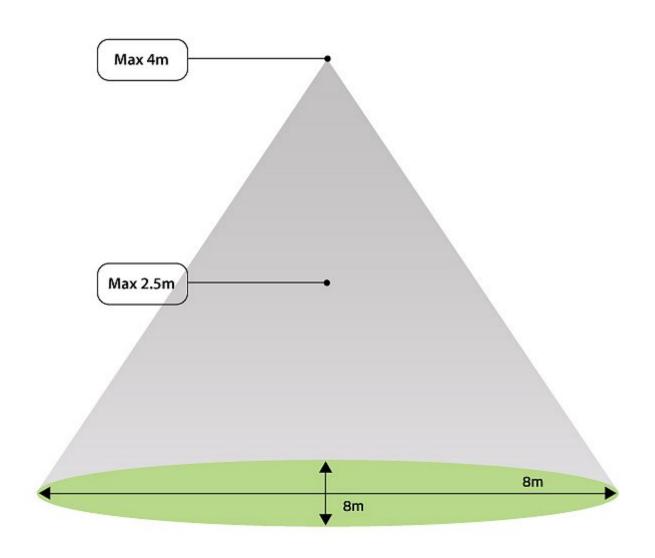

	ORDER CODES
Code	Description
R43	Reacta 43 Sensor, Recessed Flush Mounted Standalone, PIR, Bright Out Function, On/Off Relay
R43 SURFACE CAN	Surface mounting can for use with R43 recessed sensor