

PRODUCT SPECIFICATION

RASSD







INTRODUCTION

The Reacta-Air Standalone Sensor is a recessed standalone passive infrared sensor offering presence detection and wireless connectivity, or both presence detection and daylight regulation for wireless connection to Reacta-Air wireless drivers. Please note this sensor is unable to group with RAS sensors mounted in luminaires, it will only connect with luminaires with RAD built in wireless drivers.

FEATURES & BENEFITS

• Mounting Type: Surface

• Wireless: Yes

• 4Maximum Mounting Height: m

• Occupancy Detection: PIR

• Daylight Control: Daylight Regulation

• Output: Wireless

• Supply Power Source: Battery

• IP Rating: IP42

• Programmer: MasterConnect app

ADJUSTABLE PARAMETERS

• Occupied mode: Presence/Absence

• Occupied Time: up to 100 minutes

• Transition Time: up to 100 minutes or forever

• Transistion Level: 1-100%

• Daylight Regulation: Enabled/Disabled

• Grouping: Enabled/Disabled


• More parameters available on programmer

IMAGES





DIAGRAMS

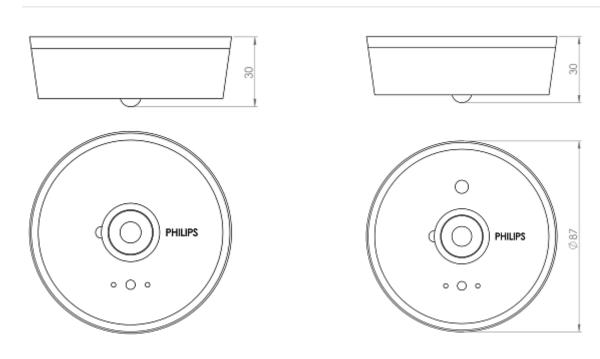

SENSOR DETECTION

