



PRODUCT SPECIFICATION

RCSS



INTRODUCTION

The Reacta Control Standalone Sensor is a recessed flush mounted standalone passive infrared sensor with daylight regulation, presence detection and wireless connectivity for use with our Reacta-Control wireless system. Optional surface mount cans are available where installations do not allow recessed mounting.

FEATURES & BENEFITS

- Flush mounting.
- Passive infrared PIR occupancy detection.
- Daylight regulation
- Area coverage 5m @ 3m mounting height.
- Nominal voltage 230v, 50/60Hz.
- Ingress protection rating IP20.
- Standby power <1w.
- Ambient operating temperature range 0-10°C to +50°C.
- Fascia colour white.


ADJUSTABLE PARAMETERS

- Set via Reacta-Control app


IMAGES



DIAGRAMS

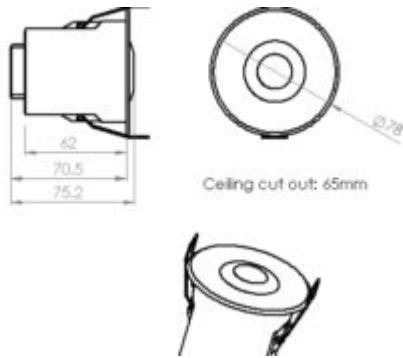

SENSOR DETECTION

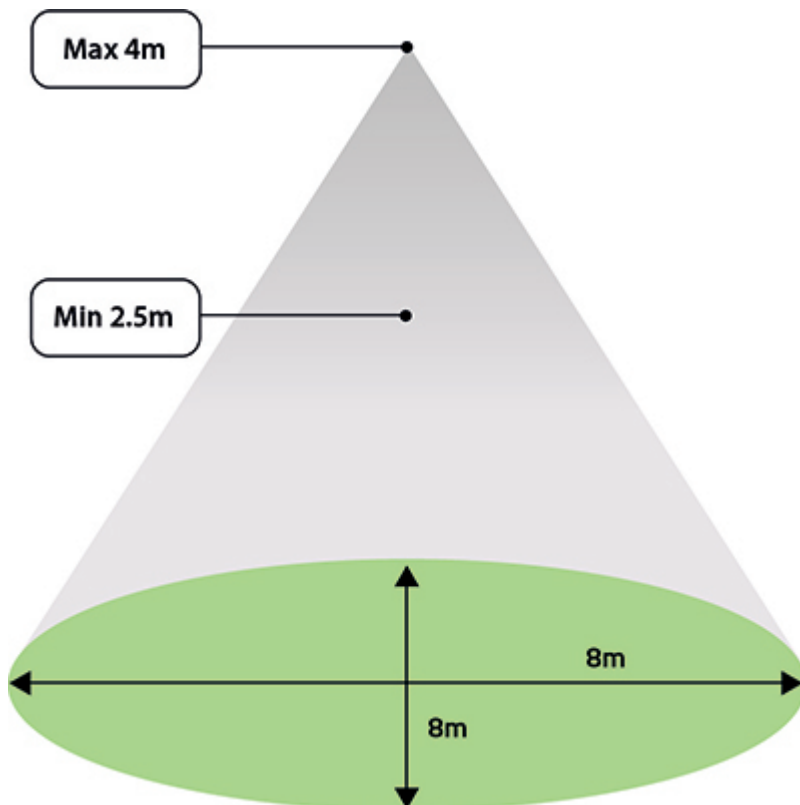

ORDER CODES

SENSOR

Code	Description
RCSS	Reacta-Control Standalone Sensor, Recessed Flush Mounted, PIR, Daylight Regulation
RCSS SURFACE CAN	Reacta-Control Standalone Sensor Surface Mount Housing