


PRODUCT SPECIFICATION

REA 6 BLBK 6P MB

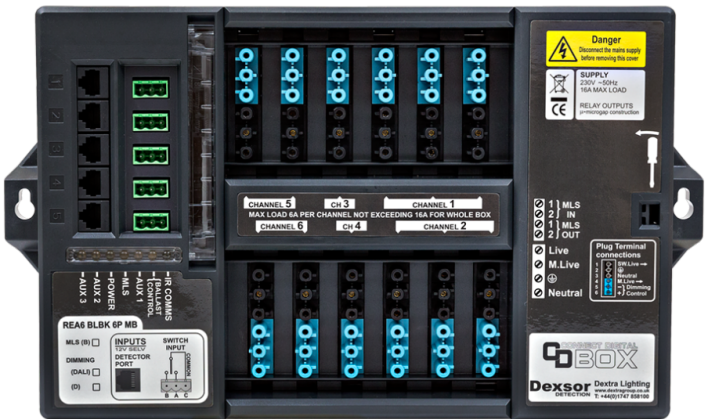

INTRODUCTION

Programmable lighting control module (LCM), 12 way luminaire connection centre with 5 separate sockets for connecting Reacta 6 sensors. Luminaires are connected using 6 pole black/grey locking connection leads whilst the sensors are connected using CAT5 RJ45 leads. 5 x Hard-wired switch inputs. Locking leads provide additional electrical connection reliability. 6 Pole pre-wired luminaire leads or 6 pole male plugs are available separately.

FEATURES & BENEFITS

- **Wireless:** No
- **Supply Power Source:** 230V
- **IP Rating:** IP20
- **Standby Power:** 3.4W
- **Programmer:** REA DPA


ADJUSTABLE PARAMETERS

- **Scene levels:** 1-100%
- More parameters available on programmer

IMAGES



DIAGRAMS

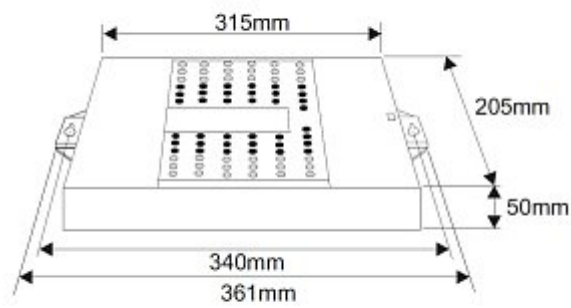

ORDER CODES

Code	Description
REA 6 BLBK 6P MB DALI	Programmable lighting control module (LCM), 12 black/blue luminaire sockets with 5 CAT5 sensor sockets and 5 switch input sockets, DALI dimming card (Digitally Addressable Lighting Interface).