



## PRODUCT SPECIFICATION

---

REAF 7 10A LL IP SENSOR



---

## INTRODUCTION

---

The REAF 7 10A LL IP is a Recessed flush mounted passive infrared occupancy and daylight sensor with fixed output relay control.


### FEATURES & BENEFITS

- Mounting Type: Recessed
- Wireless: No
- Maximum Mounting Height: 3.5m
- Occupancy Detection: PIR
- Daylight Control: Bright Out
- Output: On/Off
- Supply Power Source: 230V
- IP Rating: IP4X
- Standby Power: 0.15W
- Programmer: REA DPA


### IMAGES



### DIAGRAMS

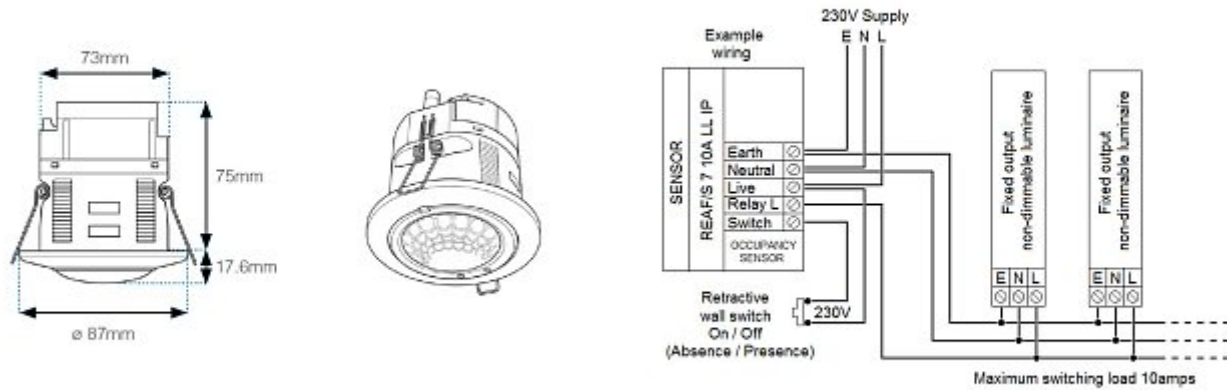

## SENSOR DETECTION

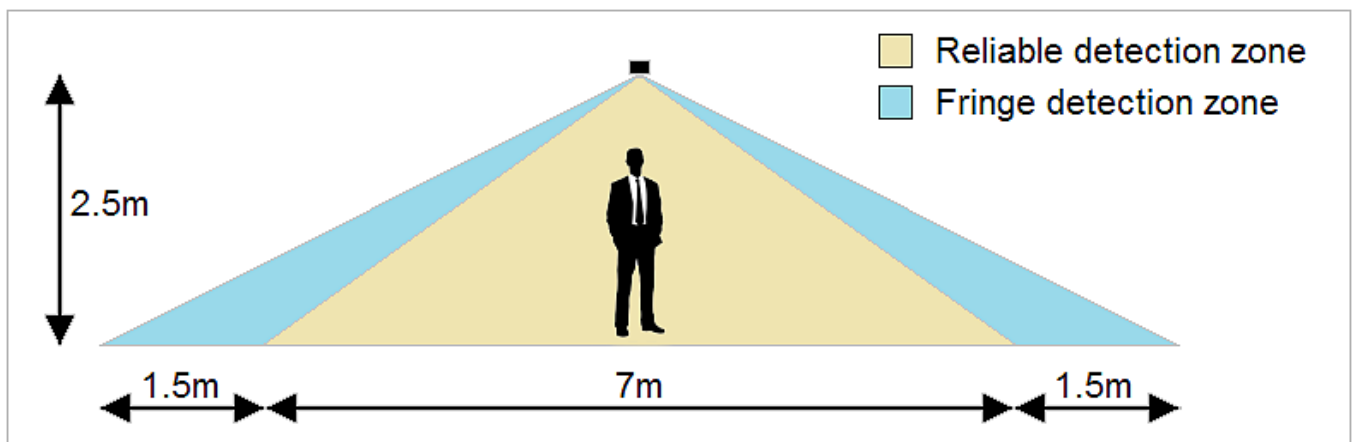

## ORDER CODES

Code	Description
REAF 7 10A LL IP	Flush Mounted, Low Level Sensor, 10Amps Switching Relay, Non-Dimming, Manual Override, IP55