



PRODUCT SPECIFICATION

REAF 7 6A LL SENSOR



INTRODUCTION

The REAF 7 6A LL is a Recessed flush mounted passive infrared occupancy and daylight sensor with fixed output relay control.



FEATURES & BENEFITS

- **Mounting Type:** Recessed
- **Wireless:** No
- **Maximum Mounting Height:** 3.5m
- **Occupancy Detection:** PIR
- **Daylight Control:** Bright Out
- **Output:** On/Off
- **Supply Power Source:** 230V
- **IP Rating:** IP4X
- **Standby Power:** 0.15W
- **Programmer:** REA DPA
- **Programmer:** REA7 PTH DIR


IMAGES



DIAGRAMS

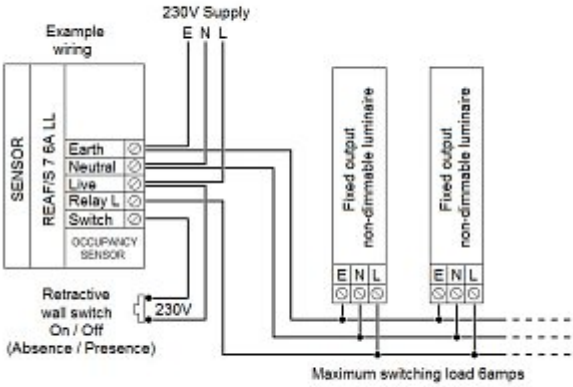

SENSOR DETECTION

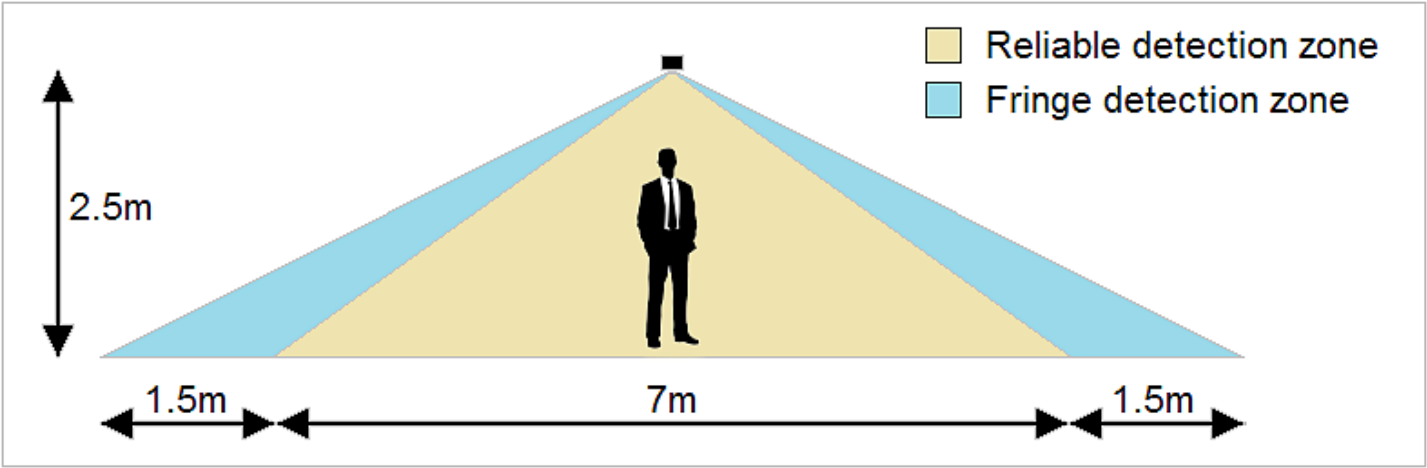

ORDER CODES

Code	Description
REAF 7 6A LL	Flush Mounted, Low Level Sensor, 6Amps Switching Relay, Non-Dimming, Manual Override, IP4X
REA 7 SURFMT	Reacta 7 Surface Mounting Kit
REA 7 WMK	Reacta 7 Wall Mounting Kit