



## PRODUCT SPECIFICATION

---

REAF 7 6A LL SENSOR



---

## INTRODUCTION

---

The REAF 7 6A LL is a Recessed flush mounted passive infrared occupancy and daylight sensor with fixed output relay control.


FEATURES & BENEFITS

- Mounting Type: Recessed
- Wireless: No
- Maximum Mounting Height: 3.5m
- Occupancy Detection: PIR
- Daylight Control: Bright Out
- Output: On/Off
- Supply Power Source: 230V
- IP Rating: IP4X
- Standby Power: 0.15W
- Programmer: REA DPA
- Programmer: REA7 PTH DIR


IMAGES



DIAGRAMS

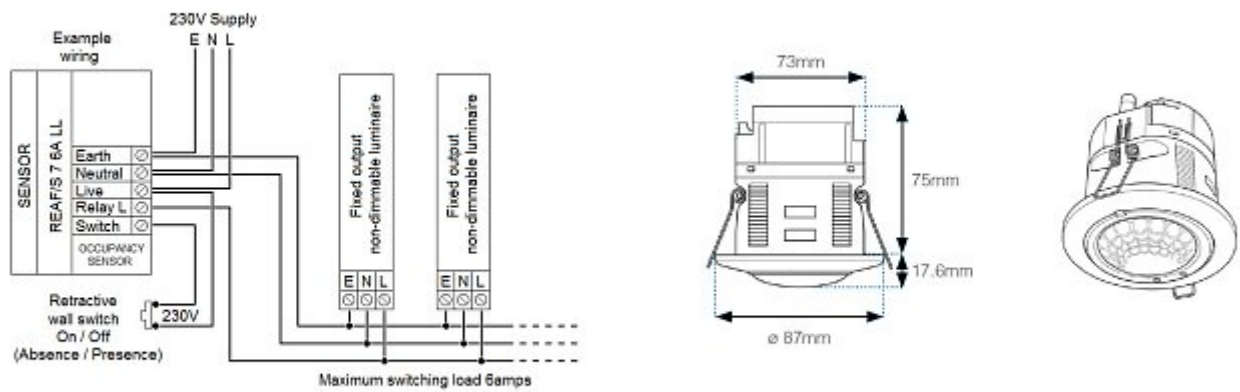

SENSOR DETECTION

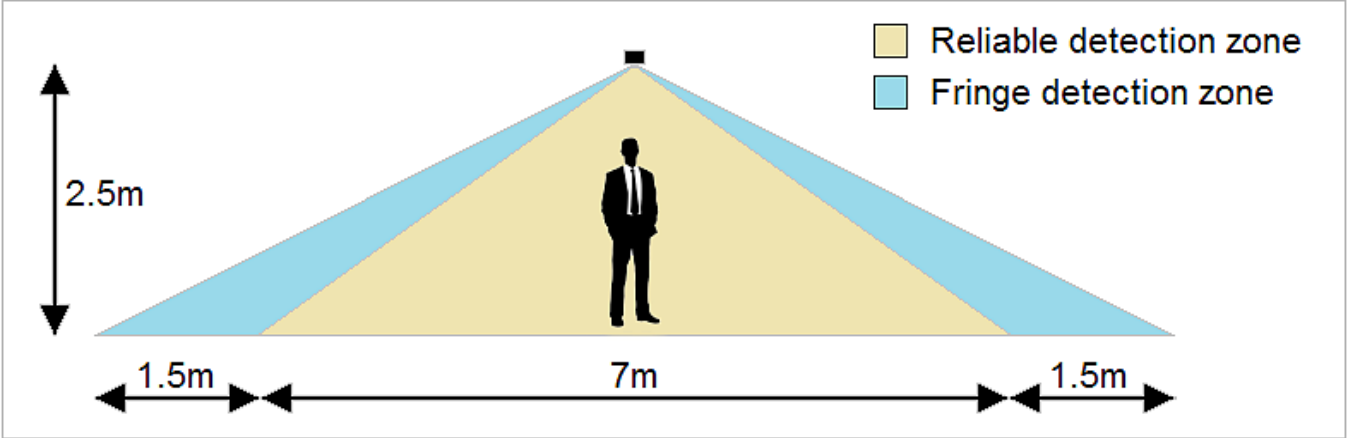

ORDER CODES

Code	Description
REAF 7 6A LL	Flush Mounted, Low Level Sensor, 6Amps Switching Relay, Non-Dimming, Manual Override, IP4X
REA 7 SURFMT	Reacta 7 Surface Mounting Kit
REA 7 WMK	Reacta 7 Wall Mounting Kit