

PRODUCT SPECIFICATION

EXI TRACK



INTRODUCTION

The EXI Track has been designed to offer retailers a simple yet effective solution for emergency lighting in track installations. This slim lime unit incorporates a 1w LED and a 3 circuit Global track adaptor as standard in white, black or grey colour options. The EXI Track compliments our extensive range of track luminaires, please see Track & Spots for further information.

**UK
CA** CE IP20

APPLICATION

- ▶ Accent Lighting
- ▶ Display Lighting
- ▶ Retail

SPECIFICATION

CONSTRUCTION

- › Housing: Injection moulded polycarbonate
- › Finish: Matt black
- › Finish: Matt white
- › Finish: Matt grey
- › Diffuser: Injection moulded high transmission opal polycarbonate
- › IP20

ENVIRONMENTAL

- › Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- › UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

EMERGENCY

- › Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.

INSTALLATION

- › Suitable for three circuit track installation

VARIATIONS

- › Available in white, black or grey finishes

PERFORMANCE

- › Up to 181 luminaire lumens per circuit Watt.

IMAGES

PRODUCT IMAGES



EXI Track White


EXI Track Black




EXI Track White

EXI Track Black

TECHNICAL

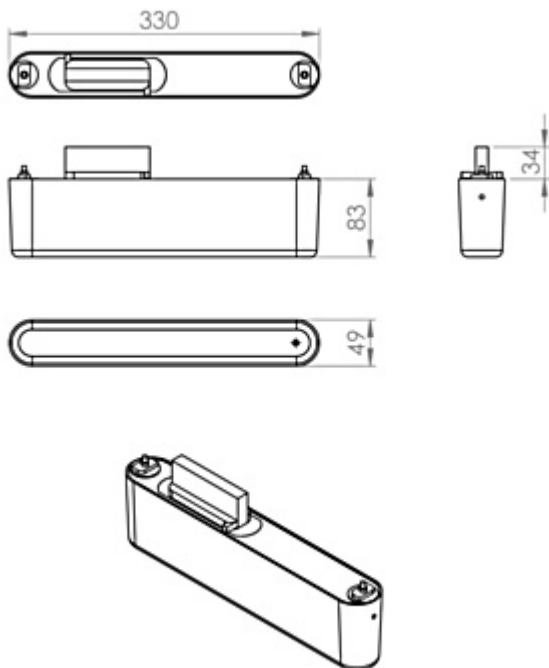

Track Dimensions and Loadings

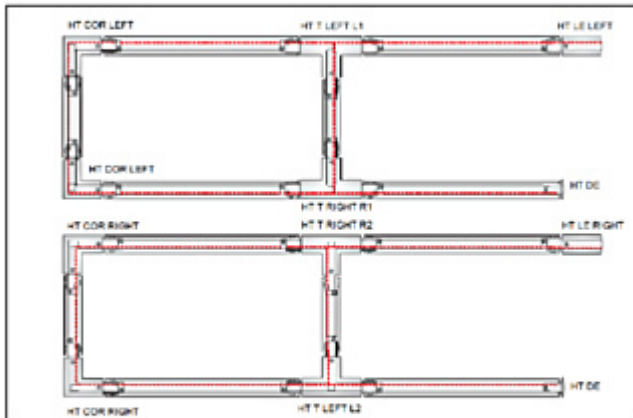

Track Polarity

 WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires

supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.

- Emergency luminaires including AME LED, EXI LED, EXI2 LED, EXI Track, HBE LED, HBE2 LED, OAT2 LED, OEZ LED and Twinspot with Nickel Metal Hydride batteries are supplied with a one year warranty for parts and labour. Lithium variants of these ranges are supplied with a three year warranty for parts and labour with the exception of the AME2, EXI3, HBE3 and TWS IP65 L7 ranges which are supplied with a one year parts and labour warranty. TWS IP65 L7 in autotest and wireless variants are supplied with the standard three year lithium battery warranty.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on

the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

ORDER CODES

LUMINAIRE

Code	Description	Power
ETRK NM3 LE3	EXI Track, 254lm, Non-Maintained, Lithium Standard Emergency 3 Hour, White	2.0W
ETRK NM3 LE3 BL	EXI Track, 254lm, Non-Maintained, Lithium Standard Emergency 3 Hour, Black	2.0W
ETRK NM3 LE3 GY	EXI Track, 254lm, Non-Maintained, Lithium Standard Emergency 3 Hour, Grey	2.0W
ETRK NM3 LS3	EXI Track, 254lm, Non-Maintained, Lithium Self Test Emergency 3 Hour, White	2.0W
ETRK NM3 LS3 BL	EXI Track, 254lm, Non-Maintained, Lithium Self Test Emergency 3 Hour, Black	2.0W
ETRK NM3 LS3 GY	EXI Track, 254lm, Non-Maintained, Lithium Self Test Emergency 3 Hour, Grey	2.0W
ETRK NM3 LA3	EXI Track, 254lm, Non-Maintained, Lithium Autotest Emergency 3 Hour, White	2.0W
ETRK NM3 LA3 BL	EXI Track, 254lm, Non-Maintained, Lithium Autotest Emergency 3 Hour, Black	2.0W
ETRK NM3 LA3 GY	EXI Track, 254lm, Non-Maintained, Lithium Autotest Emergency 3 Hour, Grey	2.0W

220-240V / 50-60Hz
IP20



Terminal Labelling:	
Power	
L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2	Unswitched Live
DA/AT3	DALI Autotest
Dimming	DALI Autotest
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim / Corridor Function

WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source is non replaceable. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.

1.

Fit the track adaptor in place, set the required circuit and offer the body up to the track.

2.

Tighten the twist brackets in place. Enter the commissioning date on the label of the battery and connect the 2-way battery connector.

3. If using flush fixings:

PLASTIC RIVET BUSH AT TOP

The side brackets should be fitted with the plastic bush at the top.

4.

PLASTIC CSK RIVET

Fit the cover, ensuring that the charge indicator is visible through its locating hole and push the plastic counter sunk rivets into place to hold the cover.

5. If using counter sunk screws:

M4 ANCHOR BUSH AT TOP

The side brackets should be fitted with the M4 anchor bush at the top.

6.

M4 CSK SCREW

Fit the cover, ensuring that the charge indicator is visible through its locating hole and fit the M4 counter sunk screws to hold the cover in place.