


PRODUCT SPECIFICATION

IMPR

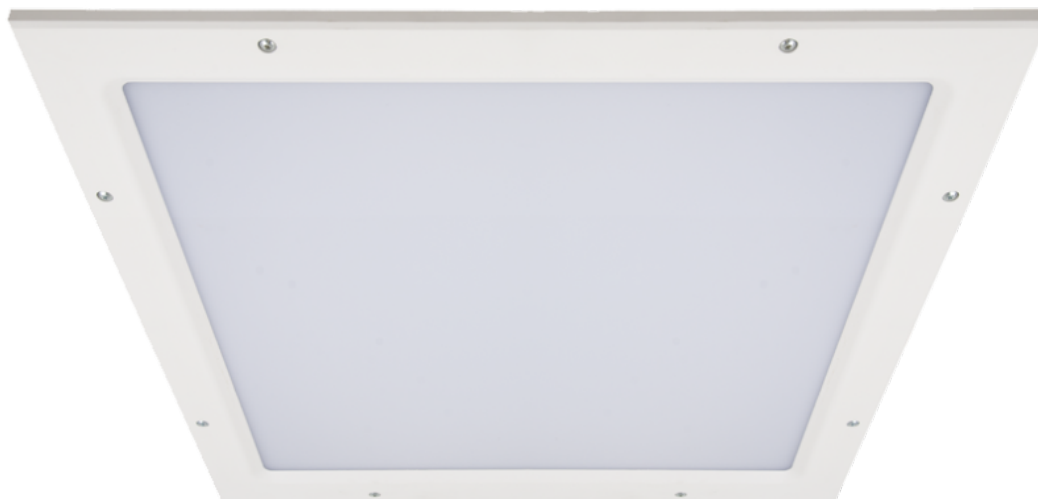

INTRODUCTION

The Impervia is a robust IP65 LED luminaire for use in applications where the luminaire must be protected from ingress of dirt, dust and water. The steel housing is rated to IP65 from both the front and rear whilst the frame is gasketed to form an IP65 seal to the ceiling surface from below. With an ABS injection moulded frame and polycarbonate diffuser the IMPR LED is also rated to IK10.

The Impervia is available in three housing sizes, 600X600, 1200X600 and 1200X300 all of which can be supplied in a range of lumen outputs, dimming variants and with integral lithium emergency in standard, self test and autotest emergency. Wireless dimming and control can be offered with our Reacta-Dim system and Reacta-Link options are also available where web based control and reporting of luminaires is required.



CE IP65 IK10 TM21: L90>60K HOURS / L80>90K HOURS 3 STEP MACADAM ELLIPSE TP(a)

APPLICATION

- Education
- Food Production
- Healthcare / Social Housing
- Industrial / Manufacturing
- Kitchen

SPECIFICATION

CONSTRUCTION

- Housing: 0.7mm CR4 steel
- Housing: Injection moulded ABS
- Finish: Polyester powder painted BS 00E55 matt white 60% gloss
- Finish: Mill finish aluminium
- Diffuser: 2mm high transmission opal polycarbonate TP(a) rated
- IK10
- IP65

;

PERFORMANCE

- Part L2 compliant
- 3SDCM Three step Macadams ellipse
- TM21: L90>60K Hours / L80>90K Hours
- Up to 142 luminaire lumens per circuit Watt.

;

ENVIRONMENTAL

- Designed to allow simple replacement of components with commonly available tools in compliance with the Eco Design Directive, please see the installation leaflet for maintenance instructions.
- All critical components are mounted on a single tray for simple end of life repair or upgrade.
- Powered by European branded drivers and emergency modules ensuring replacement parts are easily sourced.
- Every luminaire is labelled with a unique ID number allowing easy identification of spare parts for the lifetime of the product.
- Contains no single use plastics or polystyrene packaging.
- Supplied in plain card boxes with paper tape ensuring packaging is easily recycled.
- Designed to allow simple disassembly for end of life recycling.
- UK based manufacturing providing local support throughout the product lifetime and minimising transportation miles.

;

EMERGENCY

- Available with optional standard, self test and autotest integral emergency with lithium batteries for extended warranty and lifetime.
- Available with standard or self test emergency with lithium batteries for extended lifetime.
- Optional Reacta-Control wireless emergency for automated centralised reporting.
- Optional central battery changeover relay

;

CONTROL

- HFR 1-10V analogue dimming
- Optional compatibility with a range of dimming systems including DALI, DSI and Switch Dimming

- Optional White tunable
- Optional integral Reacta-Link for integration with Reacta-Link wireless installations
- Optional integral Reacta-Control for integration with Reacta-Control wireless installations

;

INSTALLATION

- Suitable for pull-up installation in concealed grid ceilings
- Suitable for plasterboard installation

;

VARIATIONS

- Available with a wide range of colour temperatures and renderings
- Available in a range of housing sizes and lumen outputs

;

IMAGES

PRODUCT IMAGES



IMPR 600x600



IMPR Microprism



IMPR 1200x300



IMPR 1200x600






IMPR SP Kit for Concealed Ceilings

PROJECT IMAGES



TECHNICAL

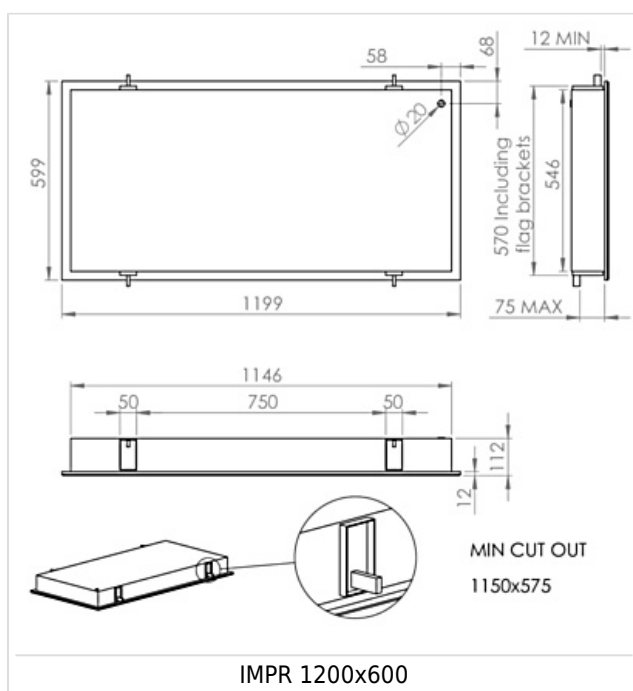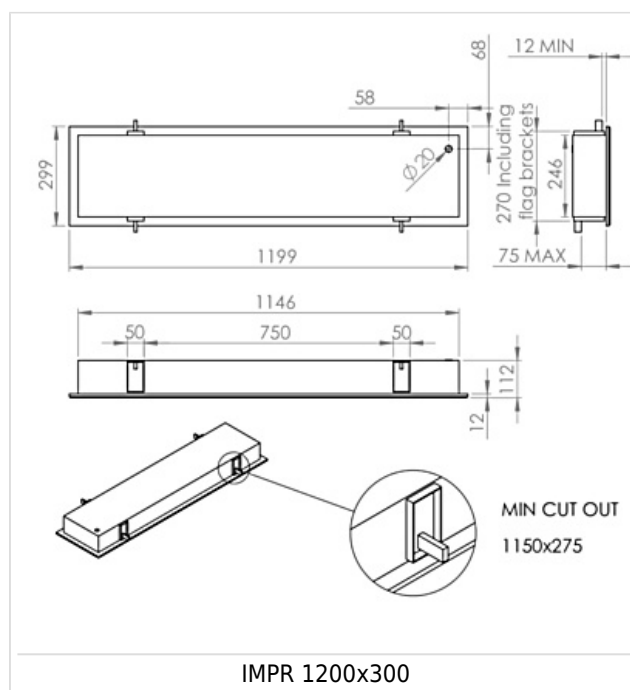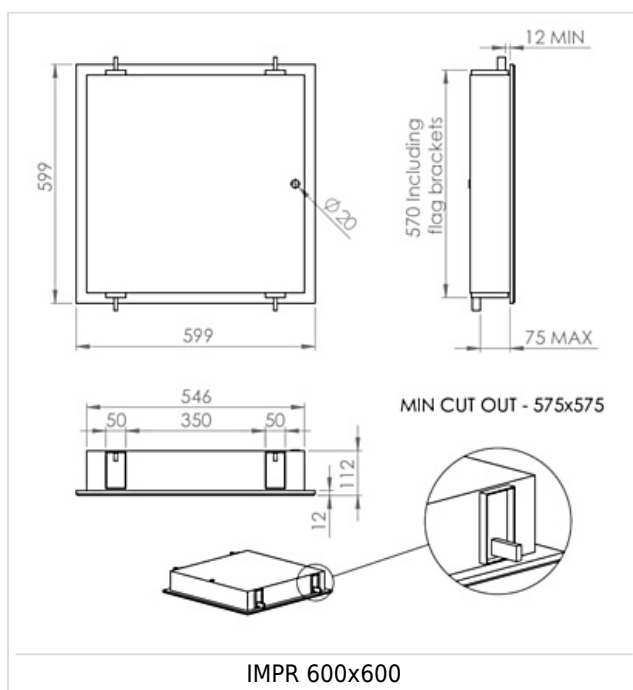

WARRANTY

At Dextra our commitment to service has been at the forefront throughout our history spanning more than forty years in the UK lighting market. Our service ethos extends beyond design and delivery, we believe supporting your installation throughout the warranty period is equally crucial, whilst the strength and longevity of Dextra Group provides peace of mind that our warranty will be supported throughout.

The Dextra range is supplied with a five year warranty commencing from the date of delivery. During the first three years

defects will be repaired on site and the warranty will include both parts and labour. For the final two years drivers, emergency modules, wireless modules, sensors and LED circuits will be supplied free of charge to replace defective components, labour and other associated costs are not included.

Certain ranges and components are subject to exemptions:

- Lithium batteries are provided with a five year warranty. During the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components. Five year warranty became effective as of 03/02/25, Lithium emergency luminaires supplied prior to this date are supported with a three year on site warranty only. Labour and other associated costs are not included. Nickel Metal Hydride and Nickel Cadmium batteries are provided with a one year warranty for parts and labour.
- Emergency luminaires including AME LED, EXI LED, EXI3, EXI Track, HBE LED, HBE3, OAT2 LED, OEZ2 and Twinspot are supplied with a one year warranty for parts and labour. Lithium variants suffixed with the 5YR part code, the Autotest emergency with the LA3 part code and wireless variants with LA3RC or LSTR part codes are supplied with a five year warranty. For these extended warranty variants for the first three years defects will be repaired on site and the warranty will include both parts and labour. For the final two years replacement batteries will be supplied free of charge to replace defective components.
- Protec Micro, PTECF7 Fire Rated Downlights, Serenus and the Opus Sconce are provided with a five year replacement luminaire only warranty. Protec FR Fire Rated Downlights are provided with a 2 year replacement luminaire only warranty.
- Controls systems such as standalone sensors, switches, marshalling boxes and cabling are provided with a one year warranty for both parts and labour. DALI control systems are provided with a two year warranty for both parts and labour.
- LEDextra ranges are supplied with a three year parts or replacement luminaire only warranty with the exception of the IMPR RGBW, the Runway RGBW, the MOD RGBW, Tanek RGBW and the DexRing. These five ranges are supplied with our standard five year warranty during which defects within the first three years will be repaired on site and the warranty includes both parts and labour. For the final two years free of charge replacement components only will be supplied to rectify any failures but labour and other associated costs are not included.
- LEDEX ranges are supplied with a three year replacement luminaire only warranty.
- The Decorative Pendant ranges, Bebo, Dene, Nova, Fino and Stix are supplied with a 3 year replacement luminaire only warranty.

All warranties are subject to correct use of the product and will be invalidated by misuse, for example incorrect installation, unsuitable environmental conditions or incorrect maintenance. It is the duty of the customer to ensure that all the fault lies with the luminaire prior to requesting replacement parts or site repairs. In the event that no defect is found with the product our costs for attending site will be recharged to the customer and credit will not be issued against returned products. No consequential losses incurred resulting from any defect with our product will be reimbursed.

Given the nature of LED technology a small percentage of LEDs may fail during the lifetime of a luminaire, this does not

cause a reduction in lumen output. As such LED luminaires are only deemed to be faulty for warranty purposes when in excess of ten percent of LEDs have failed in a single luminaire.

On site repair of products under warranty will be undertaken during normal working hours, 9am to 5pm Monday to Friday, and will require unrestricted access to luminaires. Where required Dextra will provide access equipment to carry out repairs at height, should luminaires have been installed in locations where reasonable provision for maintenance access has not been made we reserve the right to supply replacement product only. On site warranty repairs will only be undertaken on the mainland of the UK and Ireland, in all other locations replacement product only will be provided.

If you require any assistance with regards to our products please contact our Customer Services department on 01747 858100.

ORDER CODES

LUMINAIRE

Opal

Code	Description	Power	Llm/W
IMPR65 L35	IMPR, Pull-Up, 600x600, 2,474llm, IP65, Opal, Colour 84	20.2W	122
IMPR65 L45	IMPR, Pull-Up, 600x600, 3,180llm, IP65, Opal, Colour 84	25.8W	123
IMPR65 L55	IMPR, Pull-Up, 600x600, 3,886llm, IP65, Opal, Colour 84	32.9W	118
IMPR65 L68	IMPR, Pull-Up, 600x600, 4,757llm, IP65, Opal, Colour 84	40.8W	116
IMPR65 L76	IMPR, Pull-Up, 600x600, 5,316llm, IP65, Opal, Colour 84	44.9W	118
IMPR65 123 L35	IMPR, Pull-Up, 1200x300, 2,236llm, IP65, Opal, Colour 84	19.8W	113
IMPR65 123 L45	IMPR, Pull-Up, 1200x300, 2,868llm, IP65, Opal, Colour 84	24.2W	119
IMPR65 123 L55	IMPR, Pull-Up, 1200x300, 3,504llm, IP65, Opal, Colour 84	30.1W	116
IMPR65 123 L68	IMPR, Pull-Up, 1200x300, 4,331llm, IP65, Opal, Colour 84	36.7W	118
IMPR65 123 L76	IMPR, Pull-Up, 1200x300, 4,840llm, IP65, Opal, Colour 84	41.0W	118
IMPR65 126 L70	IMPR, Pull-Up, 1200x600, 5,364llm, IP65, Opal, Colour 84	38.1W	141
IMPR65 126 L90	IMPR, Pull-Up, 1200x600, 6,940llm, IP65, Opal, Colour 84	49.0W	142
IMPR65 126 L136	IMPR, Pull-Up, 1200x600, 10,392llm, IP65, Opal, Colour 84	76.8W	135
IMPR65 126 L152	IMPR, Pull-Up, 1200x600, 11,600llm, IP65, Opal, Colour 84	86.9W	133

Microprism

Code	Description	Power	Llm/W
IMPR65 L35 MP	IMPR, Pull-Up, 600x600, 2,125Ilm, IP65, Microprism, Colour 84	20.2W	105
IMPR65 L45 MP	IMPR, Pull-Up, 600x600, 2,732Ilm, IP65, Microprism, Colour 84	25.8W	106
IMPR65 L55 MP	IMPR, Pull-Up, 600x600, 3,339Ilm, IP65, Microprism, Colour 84	32.9W	101
IMPR65 L68 MP	IMPR, Pull-Up, 600x600, 4,128Ilm, IP65, Microprism, Colour 84	40.8W	101
IMPR65 L76 MP	IMPR, Pull-Up, 600x600, 4,613Ilm, IP65, Microprism, Colour 84	44.9W	103
IMPR65 123 L35 MP	IMPR, Pull-Up, 1200x300, 2,016Ilm, IP65, Microprism, Colour 84	19.8W	102
IMPR65 123 L45 MP	IMPR, Pull-Up, 1200x300, 2,592Ilm, IP65, Microprism, Colour 84	24.2W	107
IMPR65 123 L55 MP	IMPR, Pull-Up, 1200x300, 3,168Ilm, IP65, Microprism, Colour 84	30.1W	105
IMPR65 123 L68 MP	IMPR, Pull-Up, 1200x300, 3,917Ilm, IP65, Microprism, Colour 84	36.7W	107
IMPR65 123 L76 MP	IMPR, Pull-Up, 1200x300, 4,378Ilm, IP65, Microprism, Colour 84	41.0W	107
IMPR65 126 L70 MP	IMPR, Pull-Up, 1200x600, 4,634Ilm, IP65, Microprism, Colour 84	38.1W	122
IMPR65 126 L90 MP	IMPR, Pull-Up, 1200x600, 5,958Ilm, IP65, Microprism, Colour 84	49.0W	122
IMPR65 126 L136 MP	IMPR, Pull-Up, 1200x600, 9,009Ilm, IP65, Microprism, Colour 84	76.8W	117
IMPR65 126 L152 MP	IMPR, Pull-Up, 1200x600, 10,062Ilm, IP65, Microprism, Colour 84	86.9W	116

Use SP Kit for concealed ceilings. 1200x600 and 1200x300 are not suitable for concealed ceilings.
Please ensure that the ceiling is adequately strengthened to support the IMPR weight.

DIMMING

Code	Description
A	DALI Digital Addressable Lighting Interface
S	Switch Dimming
D	DSI Digital Dimming
H	HFR Analogue 1-10v
C	Bi-Level Dimming For Standalone Switched Sensor
WT	White Tunable (Lumen Outputs Vary from Standard)

Please click [here](#) for full details on our white tunable offer.

CONTROL

Code	Description
RLI	Reacta-Link, Wireless Enabled Luminaire
RC	Reacta-Control, Wireless Enabled Luminaire

Please click [here](#) for full details on our wireless controls.

EMERGENCY

Code	Description
LE3	Lithium Standard Emergency 3 Hour
LS3	Lithium Selftest Emergency 3 Hour
LA3	Lithium Autotest Emergency 3 Hour
LSTR	Lithium Reacta-Link Emergency 3 Hour
LA3RC	Lithium Reacta-Control Emergency 3 Hour
CB	Central Battery, Please Specify 110V or 230V when Ordering

MISCELLANEOUS


Code	Description
C**	Select Colour Temperature and Rendering; C827, C83, C85, C865, C93, C94
TRS	Tamper Resistant Screws
TRS INSTALL KIT	Tamper Resistant Compatible Screwdriver Heads
LSF	Low Smoke Zero Halogen
SP	Spring T Ceiling Kit, 600x600 Variants Only.

220-240V / 50-60Hz

IP65

Terminal Labelling:

Power	
L1	Switched Live
E	Earth
N	Neutral
Emergency	
L2	Unswitched Live
DA/AT3	DALI Autotest
DA/AT3	DALI Autotest
Dimming	
-/D1/DA	Analogue/DSI/DALI
+/D2/DA	Analogue/DSI/DALI
L3	Switch Dim /
	Corridor Function

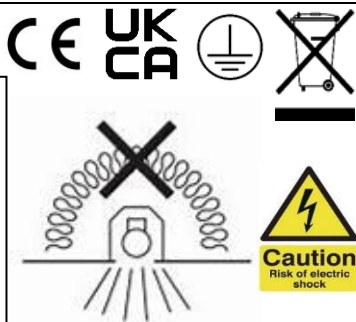

WARNING: Luminaire must be earthed. Risk of electric shock from LED boards if operated with cover removed. Installation / operation outside of luminaires intended scope invalidates warranty. Suitable only for domestic / light industrial / industrial applications within the scope of EN55015. Tested to compliance with BSEN 60598: specification for general requirements and tests. Must be installed by a suitably qualified person in accordance with all relevant legislation. Ambient operating temperature of 0°C to 25°C. If maximum operating temperature is exceeded luminaire will automatically dim / switch off. Terminal blocks are rated to 16A unless stated otherwise. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. **LUMINAIRES WITH EMERGENCY PACK:** When supply is isolated battery output terminals may be live if battery is connected. Isolate mains and battery before servicing. Emergency luminaires require unswitched live connection taken from same phase as switched supply. When unswitched supply is connected status indicator illuminates green, when unswitched supply is disconnected indicator extinguishes and luminaire operates in emergency mode. 24 hour charge period required before undertaking full discharge test. Emergency test sheets provided should be used to record all emergency tests. Batteries should be replaced when 3 hour duration is not met. Excessive switching of permanent live may result in premature battery failure. Battery electrolyte can be harmful to eyes / open wounds, do not puncture, if electrolyte touches skin / eyes flush with water. Do not incinerate batteries.


1.

For installation into Burgess Spring Tee, an additional frame and support rails must be used. Order luminaire with the suffix "SP".

Follow steps 12 – 14 when installing the fitting into Spring Tee ceiling. Continue to adjust flag brackets and wire as per main instructions.


For installation into Plasterboard, please read the Plasterboard considerations on page 3.

2.

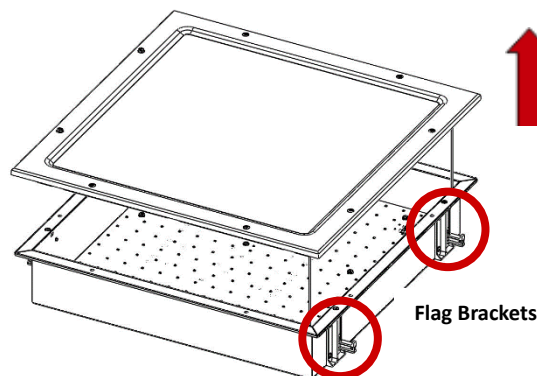


Remove diffuser by loosening each of the 8 retaining screws.

3.

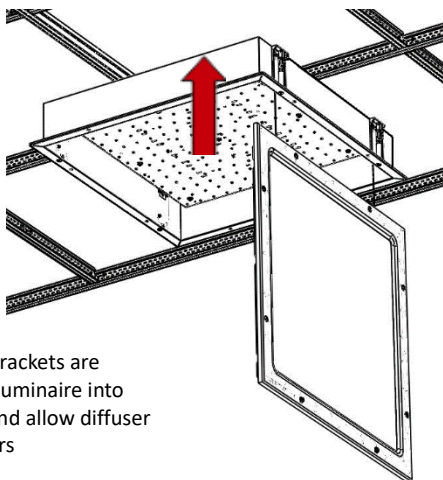


Ensure the flag brackets are folded in. Insert luminaire into the ceiling grid and allow diffuser to hang on tethers

4.

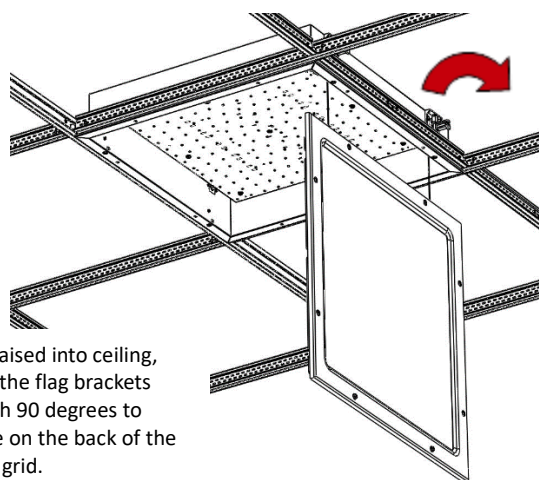


Once raised into ceiling, rotate the flag brackets through 90 degrees to engage on the back of the ceiling grid.

5.

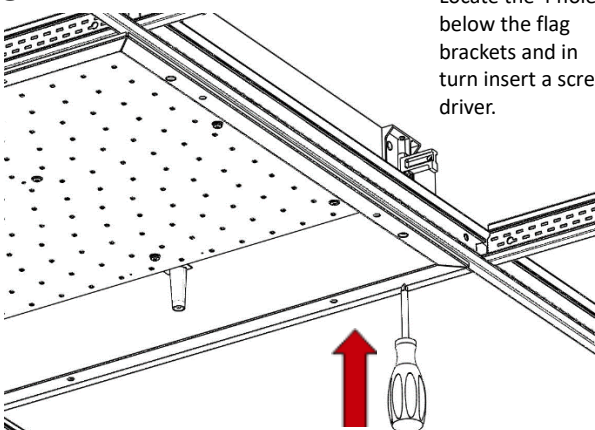


Locate the 4 holes below the flag brackets and in turn insert a screw driver.

6.

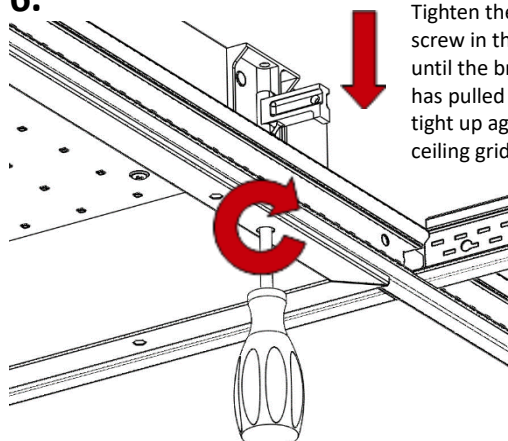

Tighten the clamp screw in the bracket until the bracket shown has pulled the fitting tight up against the ceiling grid.

IMPR Installation

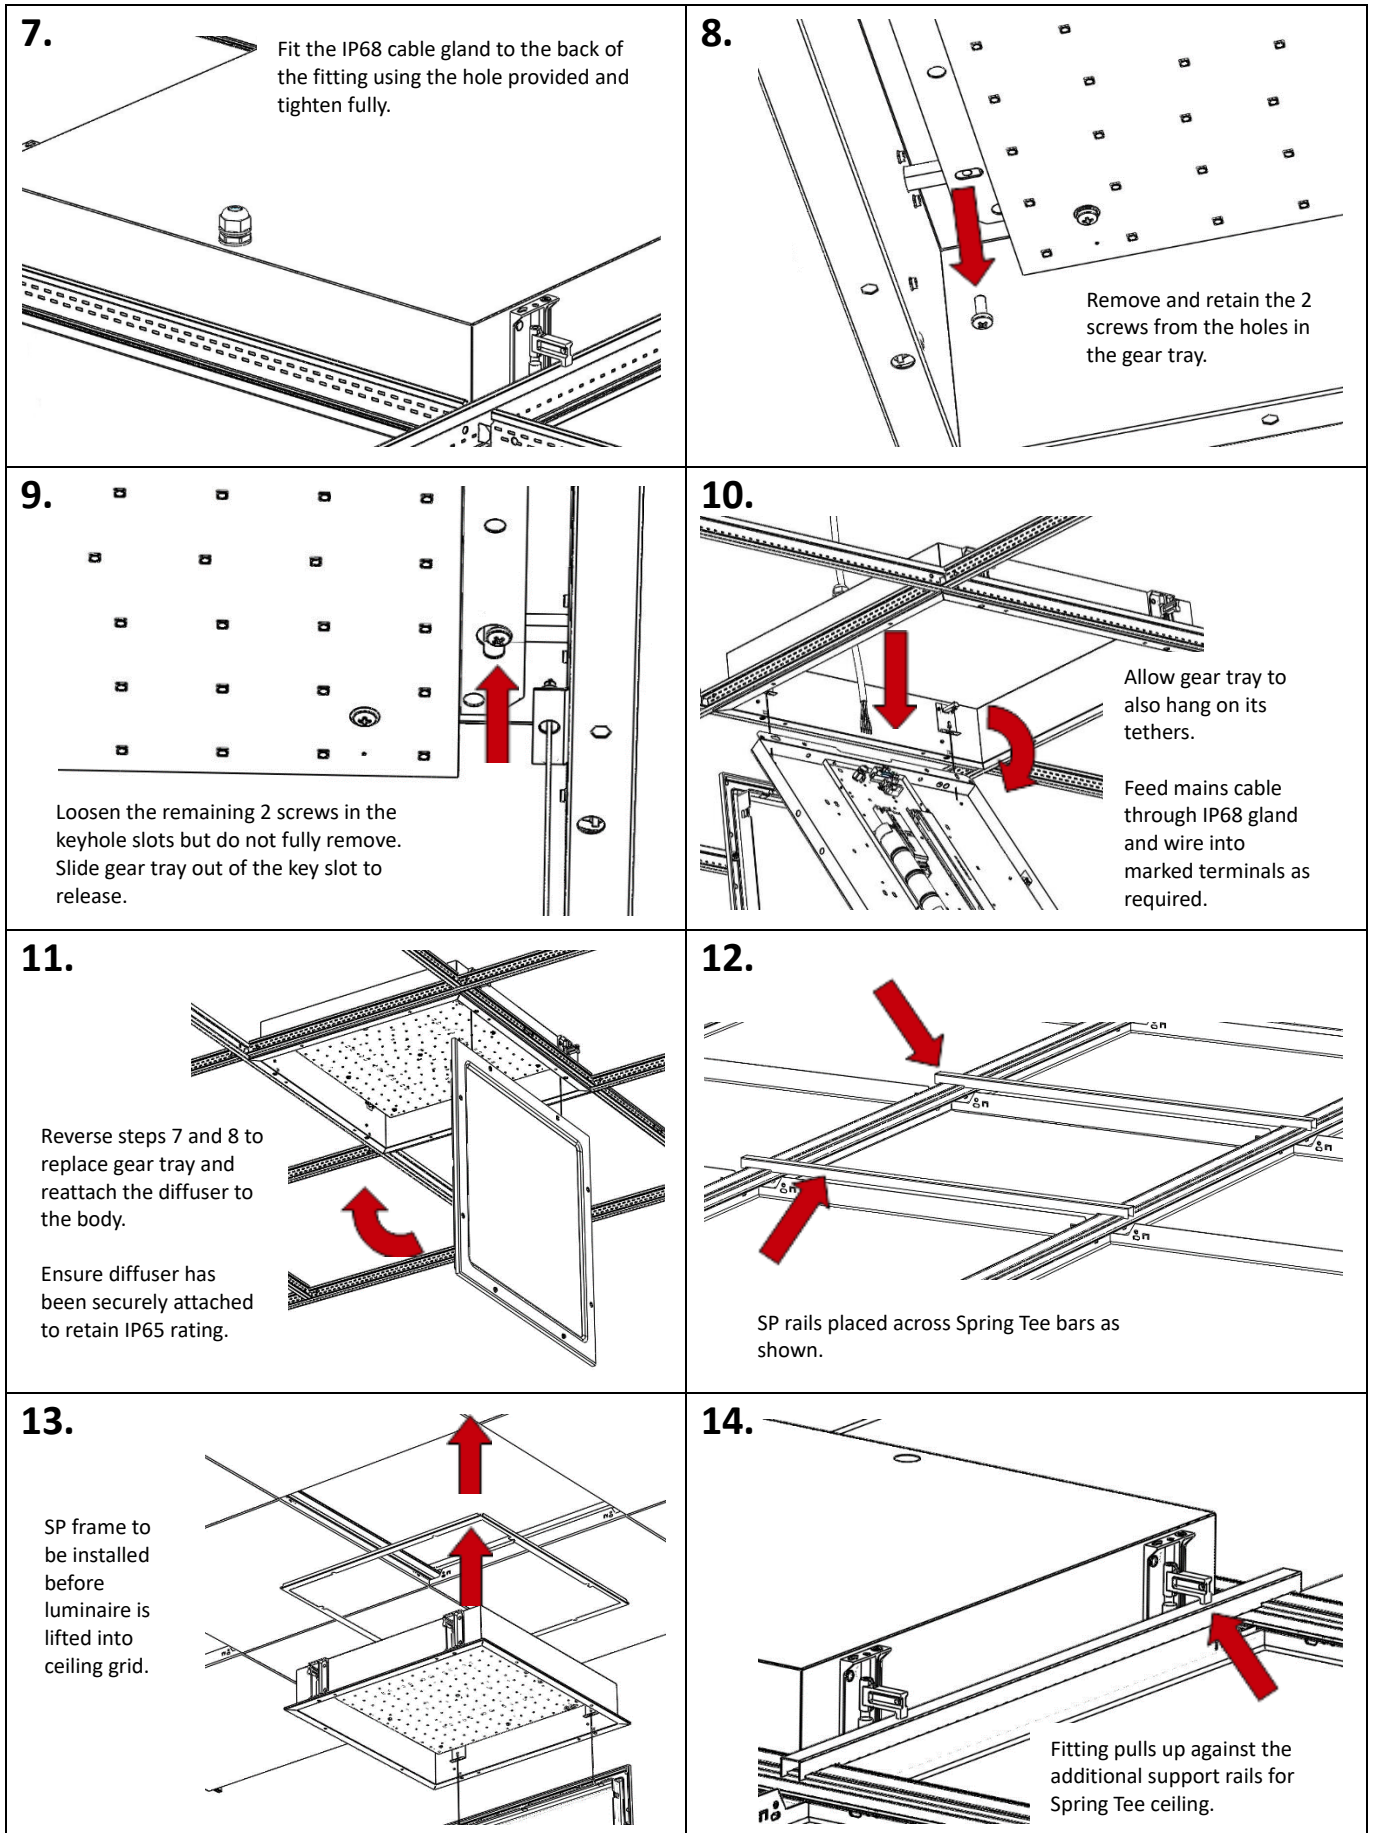

IMPR Installation

Plasterboard Considerations

Before installing, ensure the ceiling can support the weight of the luminaire.

If the luminaire's weight cannot be supported by the ceiling, two supports must be made to fit opposing sides of the plasterboard apertures.


Minimum Required Aperture:

575x575mm

1175x575mm

1175x275mm

Fitting pulls up against the two supports.

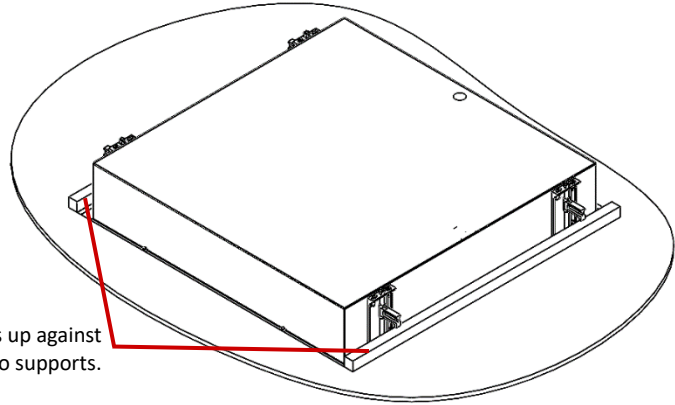


Maintenance

① Disconnect luminaire before undertaking before undertaking any maintenance or cleaning.

② Cleaning should be undertaken on external parts of the luminaire only using a slightly damp lint free cloth.

③ To remove frame use a pan pozi screwdriver.



④ Use a pan pozi screwdriver when removing gear tray and components.

⑤ Please contact Dextra for assistance with spare component supply.

