



# PRODUCT SPECIFICATION

---

## RLS REMOTE SENSOR



---

## INTRODUCTION

---

The Reacta-Link Standalone Sensor is a recessed standalone passive infrared sensor offering presence detection and wireless connectivity for use with our Reacta-Link wireless system.

---

## FEATURES & BENEFITS

---

### FEATURES AND BENEFITS

- Flush mounting.
- Passive infrared PIR occupancy detection.
- Area coverage 5m @ 3m mounting height.
- Nominal voltage 230v, 50/60Hz.
- Ingress protection rating IP20.
- Standby power <1w.
- Ambient operating temperature range -10°C to +50°C.
- Fascia colour white.

---

## ADJUSTABLE PARAMETERS

---

- Set during Reacta-Link commissioning.

---

## IMAGES


---



---

## DIAGRAMS

---

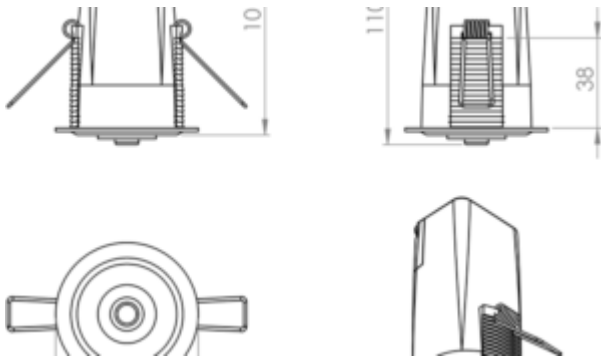

## SENSOR DETECTION

