



PRODUCT SPECIFICATION

RLS REMOTE SENSOR



INTRODUCTION

The Reacta-Link Standalone Sensor is a recessed standalone passive infrared sensor offering presence detection and wireless connectivity for use with our Reacta-Link wireless system.

FEATURES & BENEFITS

FEATURES AND BENEFITS

- Flush mounting.
- Passive infrared PIR occupancy detection.
- Area coverage 5m @ 3m mounting height.
- Nominal voltage 230v, 50/60Hz.
- Ingress protection rating IP20.
- Standby power <1w.
- Ambient operating temperature range -10°C to +50°C.
- Fascia colour white.


ADJUSTABLE PARAMETERS

- Set during Reacta-Link commissioning.

IMAGES



DIAGRAMS

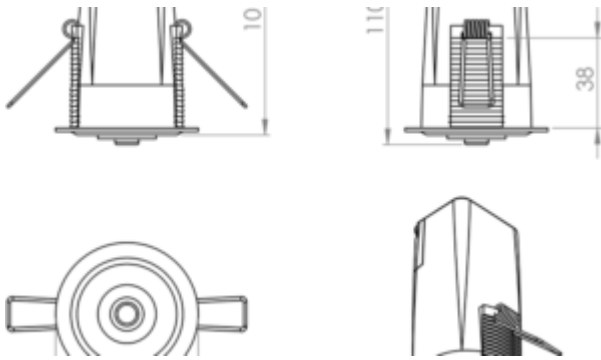

SENSOR DETECTION

